


Discount Code(s): 046 PVC Schedule 40 Molded Reinforced Fittings _____
 085 PVC Schedule 80 Fabricated Expansion Joints _____
 086 PVC Schedule 80 Molded Reinforced Fittings _____
 096 CPVC Schedule 80 Molded Reinforced Fittings _____
 470 Double Containment Pressure Fittings _____

Item prices may have changed from those shown in this sheet. See Spears® On-line Catalog for most current pricing, updated daily.

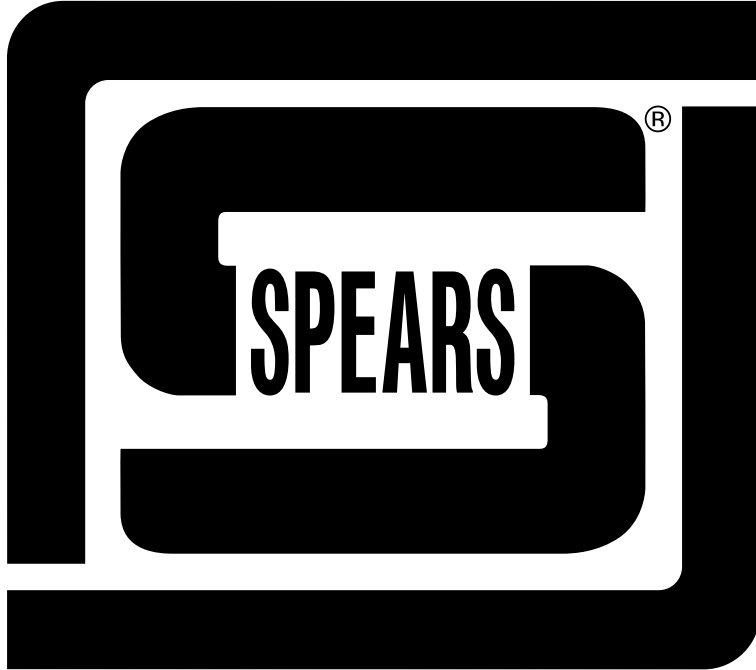

Double Containment Fittings

with Double Containment Design & Installation Guide

Constructed from Spears® Pressure Fittings

Uses Standard Pipe of Corresponding Size & Schedule

Installation Guide Included



Quality Systems Certificate No. 293
 Corporate Facilities, Sylmar, CA
 Assessed to ISO 9001: 2008

Visit our web site:
www.spearsmfg.com

PRICE SCHEDULE DC-1-0910
 Effective September 26, 2010
 Supersedes DC-1-1009



Double Containment Overview

DOUBLE CONTAINMENT SYSTEM DESIGN

Spears® Double Containment (DC) Fittings are constructed from standard fittings that are to be *assembled on the jobsite*. Spears® DC fittings work with standard pipe for both Carrier and Containment lines. Carrier fittings are equipped with special extender couplings for connection to carrier pipe. Simple, slip-on centralizer brackets used on the carrier pipe support this assembly inside the containment pipe. This design allows the carrier fitting to "float" within the containment fitting, allowing ease of movement for installation while reducing problems associated with thermal expansion and contraction during operation. This simplified approach to double containment makes installation very easy. However, successful installation requires proper design and planning of system layout, a basic understanding of how Spears® double containment fitting design works, and specific attention to a proper sequence of general assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for additional details on design, installation and different configuration applications. DC fitting sizes are listed through 12", but additional sizes are available on request.

CONFIGURATIONS

DC Pipe: Spears® DC Fittings can be used with any standard pipe of the corresponding size and schedule. As a result, pipe is not listed in this Price Schedule.


DC Fittings: Each configuration includes all components to form an internal Carrier Fitting with applicable Extender-Couplings and an external Containment fitting. Each DC Fitting configuration is specified as Carrier Material & Schedule x Containment Material & Schedule. Refer to example below (additional information is found in specific fitting sections).

Example

A Double Containment 90° Ell having a 1/2" Schedule 40 Carrier and 2" Schedule 40 Containment pipe would be listed as follows:

Product Name ————— **DC 90° Ell**
 Configuration Description — **PVC Sch 40 x PVC Sch 40**

| Part Number | Size | Disc Code | Price Each |
|----------------|-------|-----------|------------|
| DC06-A005-A020 | 1/2X2 | 470 | 32.78 |



Centralizer Brackets should be ordered separately for Carrier pipe support in runs of Containment pipe.


Valve Boxes: Like DC Fittings, Valve Boxes include all necessary components for connection to the designated Carrier x Containment system. Valve Boxes include the applicable True Union Industrial Ball Valve, Ball Check Valve, or Diaphragm Valve, with designated elastomer seals. Refer to example below (additional information is found in specific Valve Box sections).

Example

A Valve Box with True Union 2000 Industrial Ball Valve having a 1/2" valve with Schedule 40 Carrier and 2" Schedule 40 Containment pipe would be listed as follows:

Product Name ————— **Valve Box, with PVC True Union 2000 Industrial Ball Valve**
 Configuration Description — **PVC Sch 40 x PVC Sch 40**

| Size | EPDM | Viton® | Disc Code |
|-------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBA20-A005-A020 280.17 | VBA30-A005-A020 285.10 | 470 |



NOT FOR USE WITH COMPRESSED AIR OR GAS

Tees




DC Tee

PVC Sch 40 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-A005-A020 | 1/2X2 | 470 | 41.15 |
| DC01-A007-A030 | 3/4X3 | 470 | 57.31 |
| DC01-A010-A030 | 1X3 | 470 | 59.35 |
| DC01-A015-A040 | 1-1/2X4 | 470 | 78.01 |
| DC01-A020-A040 ¹ | 2X4 | 470 | 279.81 |
| DC01-A030-A060 ¹ | 3X6 | 470 | 646.27 |
| DC01-A040-A080 | 4X8 | 470 | 393.64 |
| DC01-A060-A100 | 6X10 | 470 | 977.38 |
| DC01-A080-A120 | 8X12 | 470 | 1494.62 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

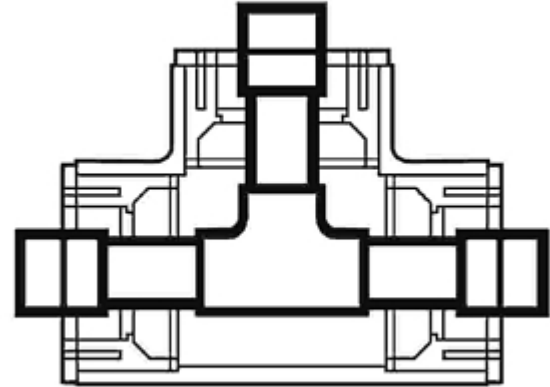

DC Tee

PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-A005-G020 | 1/2X2 | 470 | 109.07 |
| DC01-A007-G030 | 3/4X3 | 470 | 348.65 |
| DC01-A010-G030 | 1X3 | 470 | 350.69 |
| DC01-A015-G040 | 1-1/2X4 | 470 | 605.48 |
| DC01-A020-G040 ¹ | 2X4 | 470 | 2510.86 |
| DC01-A030-G060 ¹ | 3X6 | 470 | 1356.73 |
| DC01-A040-G080 | 4X8 | 470 | 2010.06 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tees are made from standard Spears® pressure fittings in designated material and Schedule selected. Included are separate internal Carrier and external Containment fittings of the same configuration. Carrier fittings are equipped with extenders to facilitate cement assembly. Certain combinations use larger Containment tees that are bushed to specified size.

DC Tee

PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-B005-A020 | 1/2X2 | 470 | 65.64 |
| DC01-B007-A030 | 3/4X3 | 470 | 87.14 |
| DC01-B010-A030 | 1X3 | 470 | 90.09 |
| DC01-B015-A040 | 1-1/2X4 | 470 | 136.45 |
| DC01-B020-A040 ¹ | 2X4 | 470 | 338.31 |
| DC01-B030-A060 ¹ | 3X6 | 470 | 778.78 |
| DC01-B040-A080 | 4X8 | 470 | 536.59 |
| DC01-B060-A100 | 6X10 | 470 | 1460.77 |
| DC01-B080-A120 | 8X12 | 470 | 2333.44 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

Important Note: Some Tees are shipped with the Carrier Tee branch extender separated from the Carrier Tee assembly to facilitate assembly. The Carrier Tee branch extension must be cemented in place after the run Carrier Tee assembly is completed. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Tees

DC Tee PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC01-B005-G020 | 1/2X2 | 470 | 133.45 |
| DC01-B007-G030 | 3/4X3 | 470 | 379.48 |
| DC01-B010-G030 | 1X3 | 470 | 381.97 |
| DC01-B015-G040 | 1-1/2X4 | 470 | 668.87 |
| DC01-B020-G040 | 2X4 | 470 | 2567.27 |
| DC01-B030-G060 | 3X6 | 470 | 1034.39 |
| DC01-B040-G080 | 4X8 | 470 | 2151.93 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tee PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-B005-B020 | 1/2X2 | 470 | 101.07 |
| DC01-B007-B030 | 3/4X3 | 470 | 121.85 |
| DC01-B010-B030 | 1X3 | 470 | 124.71 |
| DC01-B015-B040 | 1-1/2X4 | 470 | 168.83 |
| DC01-B020-B040 ¹ | 2X4 | 470 | 630.68 |
| DC01-B030-B060 ¹ | 3X6 | 470 | 941.95 |
| DC01-B040-B080 | 4X8 | 470 | 758.34 |
| DC01-B060-B100 | 6X10 | 470 | 1441.85 |
| DC01-B080-B120 | 8X12 | 470 | 3327.28 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tee CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-C005-A020 | 1/2X2 | 470 | 71.38 |
| DC01-C007-A030 | 3/4X3 | 470 | 93.91 |
| DC01-C010-A030 | 1X3 | 470 | 105.70 |
| DC01-C015-A040 | 1-1/2X4 | 470 | 175.72 |
| DC01-C020-A040 ¹ | 2X4 | 470 | 390.67 |
| DC01-C030-A060 ¹ | 3X6 | 470 | 902.80 |
| DC01-C040-A080 | 4X8 | 470 | 719.73 |
| DC01-C060-A100 | 6X10 | 470 | 1678.16 |
| DC01-C080-A120 | 8X12 | 470 | 2642.27 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tee CPVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-C005-B020 | 1/2X2 | 470 | 106.73 |
| DC01-C007-B030 | 3/4X3 | 470 | 128.54 |
| DC01-C010-B030 | 1X3 | 470 | 140.44 |
| DC01-C015-B040 | 1-1/2X4 | 470 | 203.14 |
| DC01-C020-B040 ¹ | 2X4 | 470 | 705.12 |
| DC01-C030-B060 ¹ | 3X6 | 470 | 1286.02 |
| DC01-C040-B080 | 4X8 | 470 | 938.20 |
| DC01-C060-B100 | 6X10 | 470 | 2684.24 |
| DC01-C080-B120 | 8X12 | 470 | 3268.72 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tee CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-C005-C020 | 1/2X2 | 470 | 111.96 |
| DC01-C007-C030 | 3/4X3 | 470 | 189.20 |
| DC01-C010-C030 | 1X3 | 470 | 201.10 |
| DC01-C015-C040 | 1-1/2X4 | 470 | 293.20 |
| DC01-C020-C040 ¹ | 2X4 | 470 | 1324.15 |
| DC01-C030-C060 ¹ | 3X6 | 470 | 1027.01 |
| DC01-C040-C080 | 4X8 | 470 | 1580.44 |
| DC01-C060-C100 | 6X10 | 470 | 2762.83 |
| DC01-C080-C120 | 8X12 | 470 | 4990.52 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

DC Tee CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|-----------------------------|---------|-----------|------------|
| DC01-C005-G020 | 1/2X2 | 470 | 138.76 |
| DC01-C007-G030 | 3/4X3 | 470 | 385.24 |
| DC01-C010-G030 | 1X3 | 470 | 397.14 |
| DC01-C015-G040 | 1-1/2X4 | 470 | 748.45 |
| DC01-C020-G040 ¹ | 2X4 | 470 | 2604.27 |
| DC01-C030-G060 ¹ | 3X6 | 470 | 1697.65 |
| DC01-C040-G080 | 4X8 | 470 | 2264.55 |

¹Configuration uses larger size Containment Tee with Outlets Bushed down

NOT FOR USE WITH COMPRESSED AIR OR GAS

90° Ells



DC 90° Ell PVC Sch 40 x PVC Sch 40


| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-A005-A020 | 1/2X2 | 470 | 32.78 |
| DC06-A007-A030 | 3/4X3 | 470 | 42.73 |
| DC06-A010-A030 | 1X3 | 470 | 44.16 |
| DC06-A015-A040 | 1-1/2X4 | 470 | 56.69 |
| DC06-A020-A040 | 2X4 | 470 | 72.13 |
| DC06-A030-A060 | 3X6 | 470 | 144.71 |
| DC06-A040-A080 | 4X8 | 470 | 281.15 |
| DC06-A060-A100 | 6X10 | 470 | 920.43 |
| DC06-A080-A120 | 8X12 | 470 | 1349.81 |

DC 90° Ell PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-A005-G020 | 1/2X2 | 470 | 87.47 |
| DC06-A007-G030 | 3/4X3 | 470 | 241.33 |
| DC06-A010-G030 | 1X3 | 470 | 242.83 |
| DC06-A015-G040 | 1-1/2X4 | 470 | 412.20 |
| DC06-A020-G040 | 2X4 | 470 | 427.65 |
| DC06-A030-G060 | 3X6 | 470 | 751.55 |
| DC06-A040-G080 | 4X8 | 470 | 1314.85 |

DC 90° Ell PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-B005-A020 | 1/2X2 | 470 | 45.85 |
| DC06-B007-A030 | 3/4X3 | 470 | 60.41 |
| DC06-B010-A030 | 1X3 | 470 | 63.26 |
| DC06-B015-A040 | 1-1/2X4 | 470 | 88.00 |
| DC06-B020-A040 | 2X4 | 470 | 104.10 |
| DC06-B030-A060 | 3X6 | 470 | 224.31 |
| DC06-B040-A080 | 4X8 | 470 | 378.90 |
| DC06-B060-A100 | 6X10 | 470 | 1115.29 |
| DC06-B080-A120 | 8X12 | 470 | 1666.84 |

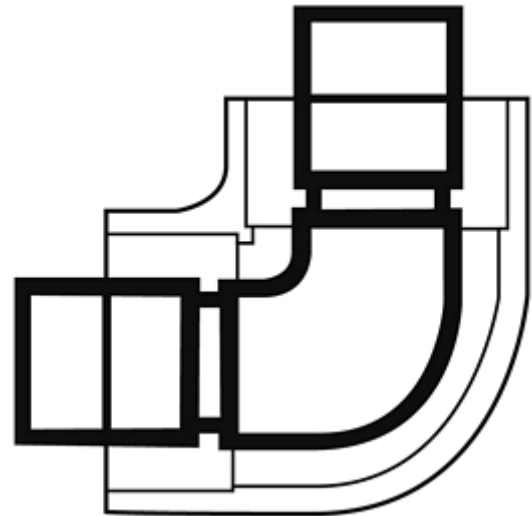

DC 90° Ells are made from standard Spears® pressure fittings in designated material and Schedule selected. Included are separate internal Carrier and external Containment fittings of the same configuration. Carrier fittings are equipped with extenders to facilitate cement assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS

Made in the U.S.A.

Progressive Products from Spears® Innovation and Technology

Page 4



90° Ells

DC 90° Ell PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-B005-G020 | 1/2X2 | 470 | 100.17 |
| DC06-B007-G030 | 3/4X3 | 470 | 258.97 |
| DC06-B010-G030 | 1X3 | 470 | 261.81 |
| DC06-B015-G040 | 1-1/2X4 | 470 | 442.26 |
| DC06-B020-G040 | 2X4 | 470 | 446.11 |
| DC06-B030-G060 | 3X6 | 470 | 223.18 |
| DC06-B040-G080 | 4X8 | 470 | 1412.61 |

DC 90° Ell PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-B005-B020 | 1/2X2 | 470 | 53.39 |
| DC06-B007-B030 | 3/4X3 | 470 | 76.55 |
| DC06-B010-B030 | 1X3 | 470 | 79.43 |
| DC06-B015-B040 | 1-1/2X4 | 470 | 107.69 |
| DC06-B020-B040 | 2X4 | 470 | 111.67 |
| DC06-B030-B060 | 3X6 | 470 | 275.96 |
| DC06-B040-B080 | 4X8 | 470 | 535.06 |
| DC06-B060-B100 | 6X10 | 470 | 1952.56 |
| DC06-B080-B120 | 8X12 | 470 | 2730.45 |

DC 90° Ell CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-C005-A020 | 1/2X2 | 470 | 49.22 |
| DC06-C007-A030 | 3/4X3 | 470 | 64.86 |
| DC06-C010-A030 | 1X3 | 470 | 75.46 |
| DC06-C015-A040 | 1-1/2X4 | 470 | 122.60 |
| DC06-C020-A040 | 2X4 | 470 | 147.95 |
| DC06-C030-A060 | 3X6 | 470 | 287.51 |
| DC06-C040-A080 | 4X8 | 470 | 552.99 |
| DC06-C060-A100 | 6X10 | 470 | 1468.33 |
| DC06-C080-A120 | 8X12 | 470 | 2817.21 |

DC 90° Ell CPVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-C005-B020 | 1/2X2 | 470 | 56.77 |
| DC06-C007-B030 | 3/4X3 | 470 | 81.01 |
| DC06-C010-B030 | 1X3 | 470 | 104.16 |
| DC06-C015-B040 | 1-1/2X4 | 470 | 143.55 |
| DC06-C020-B040 | 2X4 | 470 | 168.90 |
| DC06-C030-B060 | 3X6 | 470 | 376.97 |
| DC06-C040-B080 | 4X8 | 470 | 709.15 |
| DC06-C060-B100 | 6X10 | 470 | 2305.56 |
| DC06-C080-B120 | 8X12 | 470 | 3880.99 |

DC 90° Ell CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-C005-C020 | 1/2X2 | 470 | 79.43 |
| DC06-C007-C030 | 3/4X3 | 470 | 140.23 |
| DC06-C010-C030 | 1X3 | 470 | 150.44 |
| DC06-C015-C040 | 1-1/2X4 | 470 | 265.38 |
| DC06-C020-C040 | 2X4 | 470 | 283.20 |
| DC06-C030-C060 | 3X6 | 470 | 493.86 |
| DC06-C040-C080 | 4X8 | 470 | 1139.99 |
| DC06-C060-C100 | 6X10 | 470 | 2823.43 |
| DC06-C080-C120 | 8X12 | 470 | 4659.33 |

DC 90° Ell CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC06-C005-G020 | 1/2X2 | 470 | 103.91 |
| DC06-C007-G030 | 3/4X3 | 470 | 263.80 |
| DC06-C010-G030 | 1X3 | 470 | 274.00 |
| DC06-C015-G040 | 1-1/2X4 | 470 | 478.13 |
| DC06-C020-G040 | 2X4 | 470 | 503.37 |
| DC06-C030-G060 | 3X6 | 470 | 932.34 |
| DC06-C040-G080 | 4X8 | 470 | 1589.40 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

45° Ells



DC 45° Ell PVC Sch 40 x PVC Sch 40


| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-A005-A020 | 1/2X2 | 470 | 33.74 |
| DC17-A007-A030 | 3/4X3 | 470 | 47.66 |
| DC17-A010-A030 | 1X3 | 470 | 48.81 |
| DC17-A015-A040 | 1-1/2X4 | 470 | 64.86 |
| DC17-A020-A040 | 2X4 | 470 | 79.95 |
| DC17-A030-A060 | 3X6 | 470 | 149.41 |
| DC17-A040-A080 | 4X8 | 470 | 277.68 |
| DC17-A060-A100 | 6X10 | 470 | 661.43 |
| DC17-A080-A120 | 8X12 | 470 | 1088.19 |

DC 45° Ell PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-A005-G020 | 1/2X2 | 470 | 105.68 |
| DC17-A007-G030 | 3/4X3 | 470 | 305.62 |
| DC17-A010-G030 | 1X3 | 470 | 306.70 |
| DC17-A015-G040 | 1-1/2X4 | 470 | 540.56 |
| DC17-A020-G040 | 2X4 | 470 | 543.33 |
| DC17-A030-G060 | 3X6 | 470 | 962.88 |
| DC17-A040-G080 | 4X8 | 470 | 1161.14 |

DC 45° Ell PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-B005-A020 | 1/2X2 | 470 | 48.56 |
| DC17-B007-A030 | 3/4X3 | 470 | 69.40 |
| DC17-B010-A030 | 1X3 | 470 | 74.34 |
| DC17-B015-A040 | 1-1/2X4 | 470 | 105.07 |
| DC17-B020-A040 | 2X4 | 470 | 125.60 |
| DC17-B030-A060 | 3X6 | 470 | 263.32 |
| DC17-B040-A080 | 4X8 | 470 | 445.07 |
| DC17-B060-A100 | 6X10 | 470 | 886.13 |
| DC17-B080-A120 | 8X12 | 470 | 1373.15 |

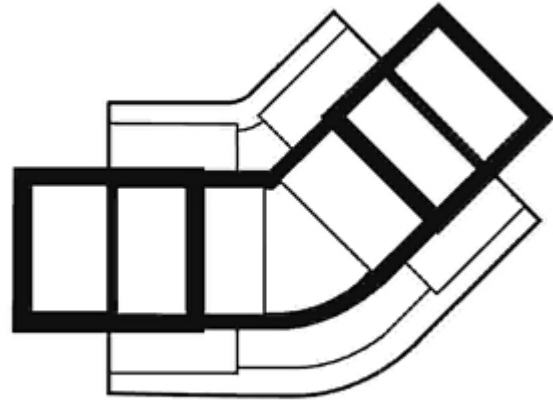

DC 45° Ells are made from standard Spears® pressure fittings in designated material and Schedule selected. Included are separate internal Carrier and external Containment fittings of the same configuration. Carrier fittings are equipped with extenders to facilitate cement assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS



45° Ells

DC 45° Ell PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-B005-G020 | 1/2X2 | 470 | 113.22 |
| DC17-B007-G030 | 3/4X3 | 470 | 327.37 |
| DC17-B010-G030 | 1X3 | 470 | 333.66 |
| DC17-B015-G040 | 1-1/2X4 | 470 | 570.12 |
| DC17-B020-G040 | 2X4 | 470 | 588.98 |
| DC17-B030-G060 | 3X6 | 470 | 1076.69 |
| DC17-B040-G080 | 4X8 | 470 | 1779.39 |

DC 45° Ell PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-B005-B020 | 1/2X2 | 470 | 71.40 |
| DC17-B007-B030 | 3/4X3 | 470 | 119.64 |
| DC17-B010-B030 | 1X3 | 470 | 129.60 |
| DC17-B015-B040 | 1-1/2X4 | 470 | 195.67 |
| DC17-B020-B040 | 2X4 | 470 | 203.49 |
| DC17-B030-B060 | 3X6 | 470 | 339.37 |
| DC17-B040-B080 | 4X8 | 470 | 592.70 |
| DC17-B060-B100 | 6X10 | 470 | 1454.03 |
| DC17-B080-B120 | 8X12 | 470 | 2010.27 |

DC 45° Ell CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-C005-A020 | 1/2X2 | 470 | 51.07 |
| DC17-C007-A030 | 3/4X3 | 470 | 72.05 |
| DC17-C010-A030 | 1X3 | 470 | 83.95 |
| DC17-C015-A040 | 1-1/2X4 | 470 | 134.24 |
| DC17-C020-A040 | 2X4 | 470 | 157.56 |
| DC17-C030-A060 | 3X6 | 470 | 258.05 |
| DC17-C040-A080 | 4X8 | 470 | 515.04 |
| DC17-C060-A100 | 6X10 | 470 | 1298.68 |
| DC17-C080-A120 | 8X12 | 470 | 2603.09 |

DC 45° Ell CPVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-C005-B020 | 1/2X2 | 470 | 73.23 |
| DC17-C007-B030 | 3/4X3 | 470 | 122.28 |
| DC17-C010-B030 | 1X3 | 470 | 133.80 |
| DC17-C015-B040 | 1-1/2X4 | 470 | 152.55 |
| DC17-C020-B040 | 2X4 | 470 | 176.05 |
| DC17-C030-B060 | 3X6 | 470 | 363.20 |
| DC17-C040-B080 | 4X8 | 470 | 662.21 |
| DC17-C060-B100 | 6X10 | 470 | 1864.06 |
| DC17-C080-B120 | 8X12 | 470 | 3240.20 |

DC 45° Ell CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-C005-C020 | 1/2X2 | 470 | 83.28 |
| DC17-C007-C030 | 3/4X3 | 470 | 150.48 |
| DC17-C010-C030 | 1X3 | 470 | 162.37 |
| DC17-C015-C040 | 1-1/2X4 | 470 | 234.64 |
| DC17-C020-C040 | 2X4 | 470 | 258.14 |
| DC17-C030-C060 | 3X6 | 470 | 586.34 |
| DC17-C040-C080 | 4X8 | 470 | 1172.52 |
| DC17-C060-C100 | 6X10 | 470 | 3551.69 |
| DC17-C080-C120 | 8X12 | 470 | 4879.68 |

DC 45° Ell CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC17-C005-G020 | 1/2X2 | 470 | 114.94 |
| DC17-C007-G030 | 3/4X3 | 470 | 330.01 |
| DC17-C010-G030 | 1X3 | 470 | 341.90 |
| DC17-C015-G040 | 1-1/2X4 | 470 | 610.23 |
| DC17-C020-G040 | 2X4 | 470 | 621.14 |
| DC17-C030-G060 | 3X6 | 470 | 1156.78 |
| DC17-C040-G080 | 4X8 | 470 | 1957.24 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Couplings



DC Coupling PVC Sch 40 x PVC Sch 40


| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-A005-A020 | 1/2X2 | 470 | 2.60 |
| DC29-A007-A030 | 3/4X3 | 470 | 8.13 |
| DC29-A010-A030 | 1X3 | 470 | 8.55 |
| DC29-A015-A040 | 1-1/2X4 | 470 | 12.37 |
| DC29-A020-A040 | 2X4 | 470 | 13.13 |
| DC29-A030-A060 | 3X6 | 470 | 42.15 |
| DC29-A040-A080 | 4X8 | 470 | 75.52 |
| DC29-A060-A100 | 6X10 | 470 | 222.83 |
| DC29-A080-A120 | 8X12 | 470 | 439.65 |

DC Coupling PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-A005-G020 | 1/2X2 | 470 | 35.56 |
| DC29-A007-G030 | 3/4X3 | 470 | 121.05 |
| DC29-A010-G030 | 1X3 | 470 | 121.40 |
| DC29-A015-G040 | 1-1/2X4 | 470 | 175.39 |
| DC29-A020-G040 | 2X4 | 470 | 176.14 |
| DC29-A030-G060 | 3X6 | 470 | 333.82 |
| DC29-A040-G080 | 4X8 | 470 | 574.60 |

DC Coupling PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-B005-A020 | 1/2X2 | 470 | 7.87 |
| DC29-B007-A030 | 3/4X3 | 470 | 15.35 |
| DC29-B010-A030 | 1X3 | 470 | 15.47 |
| DC29-B015-A040 | 1-1/2X4 | 470 | 23.91 |
| DC29-B020-A040 | 2X4 | 470 | 24.87 |
| DC29-B030-A060 | 3X6 | 470 | 73.99 |
| DC29-B040-A080 | 4X8 | 470 | 113.94 |
| DC29-B060-A100 | 6X10 | 470 | 294.44 |
| DC29-B080-A120 | 8X12 | 470 | 519.54 |

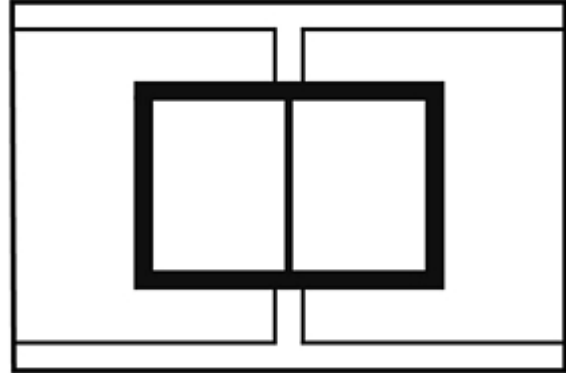

DC Couplings are made from standard Spears® pressure fittings in designated material and Schedule selected. Included are separate internal Carrier and external Containment fittings of the same configuration (no extenders required on Couplings). See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Couplings

DC Coupling PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-B005-G020 | 1/2X2 | 470 | 40.74 |
| DC29-B007-G030 | 3/4X3 | 470 | 128.19 |
| DC29-B010-G030 | 1X3 | 470 | 128.38 |
| DC29-B015-G040 | 1-1/2X4 | 470 | 181.90 |
| DC29-B020-G040 | 2X4 | 470 | 187.89 |
| DC29-B030-G060 | 3X6 | 470 | 327.10 |
| DC29-B040-G080 | 4X8 | 470 | 606.20 |

DC Coupling PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-B005-B020 | 1/2X2 | 470 | 19.59 |
| DC29-B007-B030 | 3/4X3 | 470 | 47.11 |
| DC29-B010-B030 | 1X3 | 470 | 47.31 |
| DC29-B015-B040 | 1-1/2X4 | 470 | 62.33 |
| DC29-B020-B040 | 2X4 | 470 | 63.28 |
| DC29-B030-B060 | 3X6 | 470 | 145.59 |
| DC29-B040-B080 | 4X8 | 470 | 193.83 |
| DC29-B060-B100 | 6X10 | 470 | 602.11 |
| DC29-B080-B120 | 8X12 | 470 | 716.16 |

DC Coupling CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-C005-A020 | 1/2X2 | 470 | 8.26 |
| DC29-C007-A030 | 3/4X3 | 470 | 16.05 |
| DC29-C010-A030 | 1X3 | 470 | 18.99 |
| DC29-C015-A040 | 1-1/2X4 | 470 | 32.45 |
| DC29-C020-A040 | 2X4 | 470 | 35.95 |
| DC29-C030-A060 | 3X6 | 470 | 95.04 |
| DC29-C040-A080 | 4X8 | 470 | 143.83 |
| DC29-C060-A100 | 6X10 | 470 | 374.85 |
| DC29-C080-A120 | 8X12 | 470 | 879.40 |

DC Coupling CPVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-C005-B020 | 1/2X2 | 470 | 19.49 |
| DC29-C007-B030 | 3/4X3 | 470 | 47.88 |
| DC29-C010-B030 | 1X3 | 470 | 50.83 |
| DC29-C015-B040 | 1-1/2X4 | 470 | 70.87 |
| DC29-C020-B040 | 2X4 | 470 | 72.18 |
| DC29-C030-B060 | 3X6 | 470 | 166.60 |
| DC29-C040-B080 | 4X8 | 470 | 204.57 |
| DC29-C060-B100 | 6X10 | 470 | 607.04 |
| DC29-C080-B120 | 8X12 | 470 | 1075.90 |

DC Coupling CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-C005-C020 | 1/2X2 | 470 | 31.05 |
| DC29-C007-C030 | 3/4X3 | 470 | 68.94 |
| DC29-C010-C030 | 1X3 | 470 | 71.85 |
| DC29-C015-C040 | 1-1/2X4 | 470 | 100.77 |
| DC29-C020-C040 | 2X4 | 470 | 104.24 |
| DC29-C030-C060 | 3X6 | 470 | 247.06 |
| DC29-C040-C080 | 4X8 | 470 | 583.61 |
| DC29-C060-C100 | 6X10 | 470 | 821.00 |
| DC29-C080-C120 | 8X12 | 470 | 1245.63 |

DC Coupling CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DC29-C005-G020 | 1/2X2 | 470 | 41.12 |
| DC29-C007-G030 | 3/4X3 | 470 | 128.97 |
| DC29-C010-G030 | 1X3 | 470 | 131.91 |
| DC29-C015-G040 | 1-1/2X4 | 470 | 195.49 |
| DC29-C020-G040 | 2X4 | 470 | 198.96 |
| DC29-C030-G060 | 3X6 | 470 | 373.62 |
| DC29-C040-G080 | 4X8 | 470 | 642.90 |


NOT FOR USE WITH COMPRESSED AIR OR GAS

Access Tees



DC Access Tee PVC Sch 40 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-A005-A020 | 1/2X2 | 470 | 40.29 |
| DCAT-A007-A030 | 3/4X3 | 470 | 67.10 |
| DCAT-A010-A030 | 1X3 | 470 | 67.93 |
| DCAT-A015-A040 | 1-1/2X4 | 470 | 95.52 |
| DCAT-A020-A040 | 2X4 | 470 | 124.60 |
| DCAT-A030-A060 | 3X6 | 470 | 343.34 |
| DCAT-A040-A080 | 4X8 | 470 | 715.76 |
| DCAT-A060-A100 | 6X10 | 470 | 1629.16 |
| DCAT-A080-A120 | 8X12 | 470 | 2300.51 |

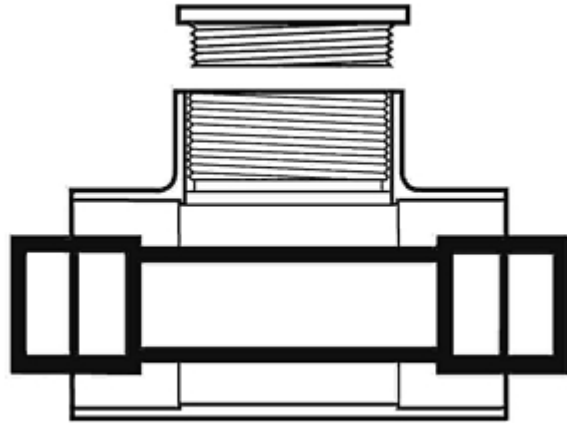

DC Access Tee PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-A005-G020 | 1/2X2 | 470 | 204.04 |
| DCAT-A007-G030 | 3/4X3 | 470 | 541.91 |
| DCAT-A010-G030 | 1X3 | 470 | 542.76 |
| DCAT-A015-G040 | 1-1/2X4 | 470 | 892.14 |
| DCAT-A020-G040 | 2X4 | 470 | 903.72 |
| DCAT-A030-G060 | 3X6 | 470 | 1227.33 |
| DCAT-A040-G080 | 4X8 | 470 | 2253.14 |

DC Access Tee PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-B005-A020 | 1/2X2 | 470 | 50.85 |
| DCAT-B007-A030 | 3/4X3 | 470 | 81.38 |
| DCAT-B010-A030 | 1X3 | 470 | 81.79 |
| DCAT-B015-A040 | 1-1/2X4 | 470 | 118.63 |
| DCAT-B020-A040 | 2X4 | 470 | 130.61 |
| DCAT-B030-A060 | 3X6 | 470 | 407.02 |
| DCAT-B040-A080 | 4X8 | 470 | 792.56 |
| DCAT-B060-A100 | 6X10 | 470 | 1784.87 |
| DCAT-B080-A120 | 8X12 | 470 | 2546.32 |

DC Access Tees are made from standard Spears® pressure fittings in designated material and Schedule selected. Included is an internal Carrier pipe section equipped with couplings and an external Containment Tee fitting equipped with a threaded Plug on the branch for access. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Access Tees

DC Access Tee PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-B005-G020 | 1/2X2 | 470 | 246.37 |
| DCAT-B007-G030 | 3/4X3 | 470 | 556.21 |
| DCAT-B010-G030 | 1X3 | 470 | 556.49 |
| DCAT-B015-G040 | 1-1/2X4 | 470 | 913.99 |
| DCAT-B020-G040 | 2X4 | 470 | 917.16 |
| DCAT-B030-G060 | 3X6 | 470 | 1291.00 |
| DCAT-B040-G080 | 4X8 | 470 | 2329.94 |

DC Access Tee PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-B005-B020 | 1/2X2 | 470 | 84.43 |
| DCAT-B007-B030 | 3/4X3 | 470 | 154.00 |
| DCAT-B010-B030 | 1X3 | 470 | 154.51 |
| DCAT-B015-B040 | 1-1/2X4 | 470 | 264.83 |
| DCAT-B020-B040 | 2X4 | 470 | 276.80 |
| DCAT-B030-B060 | 3X6 | 470 | 611.69 |
| DCAT-B040-B080 | 4X8 | 470 | 1016.10 |
| DCAT-B060-B100 | 6X10 | 470 | 2752.63 |
| DCAT-B080-B120 | 8X12 | 470 | 3347.01 |

DC Access Tee CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-C007-A030 | 3/4X3 | 470 | 82.93 |
| DCAT-C010-A030 | 1X3 | 470 | 88.83 |
| DCAT-C015-A040 | 1-1/2X4 | 470 | 135.70 |
| DCAT-C020-A040 | 2X4 | 470 | 152.73 |
| DCAT-C030-A060 | 3X6 | 470 | 436.57 |
| DCAT-C040-A080 | 4X8 | 470 | 850.86 |
| DCAT-C060-A100 | 6X10 | 470 | 1945.76 |
| DCAT-C080-A120 | 8X12 | 470 | 2544.56 |

DC Access Tee CPVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-C005-B020 | 1/2X2 | 470 | 85.18 |
| DCAT-C007-B030 | 3/4X3 | 470 | 155.52 |
| DCAT-C010-B030 | 1X3 | 470 | 161.43 |
| DCAT-C015-B040 | 1-1/2X4 | 470 | 223.96 |
| DCAT-C020-B040 | 2X4 | 470 | 298.93 |
| DCAT-C030-B060 | 3X6 | 470 | 676.45 |
| DCAT-C040-B080 | 4X8 | 470 | 1264.02 |
| DCAT-C060-B100 | 6X10 | 470 | 2706.84 |
| DCAT-C080-B120 | 8X12 | 470 | 4234.17 |

DC Access Tee CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-C005-C020 | 1/2X2 | 470 | 142.41 |
| DCAT-C007-C030 | 3/4X3 | 470 | 470.88 |
| DCAT-C010-C030 | 1X3 | 470 | 475.40 |
| DCAT-C015-C040 | 1-1/2X4 | 470 | 672.22 |
| DCAT-C020-C040 | 2X4 | 470 | 679.19 |
| DCAT-C030-C060 | 3X6 | 470 | 1453.65 |
| DCAT-C040-C080 | 4X8 | 470 | 3691.84 |
| DCAT-C060-C100 | 6X10 | 470 | 3948.15 |
| DCAT-C080-C120 | 8X12 | 470 | 6016.45 |

DC Access Tee CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCAT-C005-G020 | 1/2X2 | 470 | 264.97 |
| DCAT-C007-G030 | 3/4X3 | 470 | 557.74 |
| DCAT-C010-G030 | 1X3 | 470 | 563.65 |
| DCAT-C015-G040 | 1-1/2X4 | 470 | 932.32 |
| DCAT-C020-G040 | 2X4 | 470 | 939.30 |
| DCAT-C030-G060 | 3X6 | 470 | 1343.19 |
| DCAT-C040-G080 | 4X8 | 470 | 2399.68 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Closure Fittings



DC Closure Fitting PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
| DCCF-A030 | 3 | 470 | 446.35 |
| DCCF-A040 | 4 | 470 | 457.32 |
| DCCF-A060 | 6 | 470 | 475.93 |
| DCCF-A080 | 8 | 470 | 656.51 |
| DCCF-A100 | 10 | 470 | 724.21 |
| DCCF-A120 | 12 | 470 | 1144.00 |

DC Closure Fitting PVC Sch 80


| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
| DCCF-B020 | 2 | 470 | 445.95 |
| DCCF-B030 | 3 | 470 | 453.60 |
| DCCF-B040 | 4 | 470 | 467.38 |
| DCCF-B060 | 6 | 470 | 495.04 |
| DCCF-B080 | 8 | 470 | 656.31 |
| DCCF-B100 | 10 | 470 | 870.98 |
| DCCF-B120 | 12 | 470 | 1396.21 |

DC Closure Fitting CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
| DCCF-C020 | 2 | 470 | 452.73 |
| DCCF-C030 | 3 | 470 | 471.61 |
| DCCF-C040 | 4 | 470 | 492.22 |
| DCCF-C060 | 6 | 470 | 599.97 |
| DCCF-C080 | 8 | 470 | 807.11 |
| DCCF-C100 | 10 | 470 | 1502.53 |
| DCCF-C120 | 12 | 470 | 2383.88 |

DC Closure Fitting PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
| DCCF-G030 | 3 | 470 | 498.06 |
| DCCF-G040 | 4 | 470 | 517.45 |
| DCCF-G060 | 6 | 470 | 613.76 |
| DCCF-G080 | 8 | 470 | 912.03 |

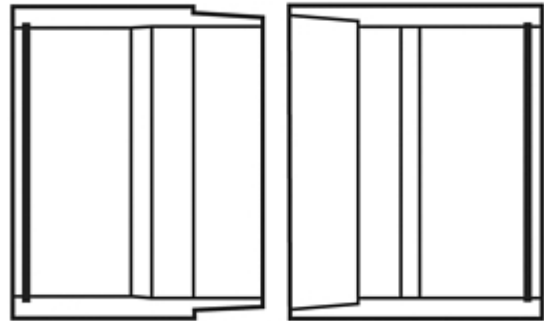


DC Closure Fittings are special split couplings for joining meeting runs of Containment piping, such as before the final Termination Fitting. Closure Fittings consist of a male component and a female component. An internal O-ring on each component serves as a "cement-wiper" during installation to assure a proper joint. A "One-step" type cement should be used to facilitate rapid assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Isolation Couplers

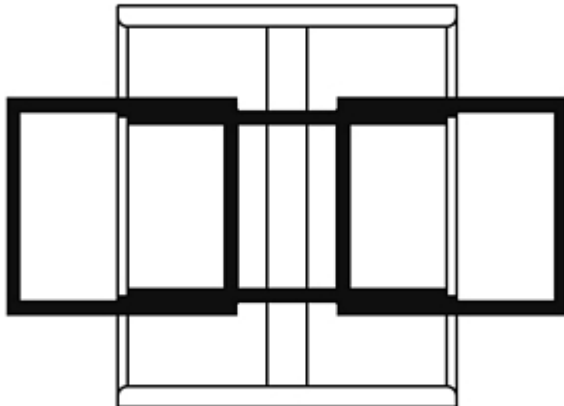

DC Isolation Couplers are to isolate a containment section for improved location identification if a leak is detected. When cemented into place, a suitable seal is formed for isolation of the containment sections. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

DC Isolation Coupler PVC Sch 40 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-A005-A020 | 1/2X2 | 470 | 32.93 |
| DCDB-A007-A030 | 3/4X3 | 470 | 52.44 |
| DCDB-A010-A030 | 1X3 | 470 | 52.71 |
| DCDB-A015-A040 | 1-1/2X4 | 470 | 58.13 |
| DCDB-A020-A040 | 2X4 | 470 | 62.14 |
| DCDB-A030-A060 | 3X6 | 470 | 99.64 |
| DCDB-A040-A080 | 4X8 | 470 | 143.36 |
| DCDB-A060-A100 | 6X10 | 470 | 191.41 |
| DCDB-A080-A120 | 8X12 | 470 | 323.76 |

DC Isolation Coupler PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-A005-G020 | 1/2X2 | 470 | 76.06 |
| DCDB-A007-G030 | 3/4X3 | 470 | 94.01 |
| DCDB-A010-G030 | 1X3 | 470 | 196.78 |
| DCDB-A015-G040 | 1-1/2X4 | 470 | 226.60 |
| DCDB-A020-G040 | 2X4 | 470 | 234.50 |
| DCDB-A030-G060 | 3X6 | 470 | 256.53 |
| DCDB-A040-G080 | 4X8 | 470 | 323.55 |

DC Isolation Coupler PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-B005-A020 | 1/2X2 | 470 | 47.53 |
| DCDB-B007-A030 | 3/4X3 | 470 | 56.91 |
| DCDB-B010-A030 | 1X3 | 470 | 62.78 |
| DCDB-B015-A040 | 1-1/2X4 | 470 | 67.13 |
| DCDB-B020-A040 | 2X4 | 470 | 72.55 |
| DCDB-B030-A060 | 3X6 | 470 | 104.07 |
| DCDB-B040-A080 | 4X8 | 470 | 155.81 |
| DCDB-B060-A100 | 6X10 | 470 | 203.61 |
| DCDB-B080-A120 | 8X12 | 470 | 350.23 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Isolation Couplers



DC Isolation Coupler PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-B005-G020 | 1/2X2 | 470 | 100.30 |
| DCDB-B010-G030 | 1X3 | 470 | 201.37 |
| DCDB-B015-G040 | 1-1/2X4 | 470 | 260.50 |
| DCDB-B020-G040 | 2X4 | 470 | 285.15 |
| DCDB-B030-G060 | 3X6 | 470 | 316.64 |
| DCDB-B040-G080 | 4X8 | 470 | 373.82 |

DC Isolation Coupler PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-B005-B020 | 1/2X2 | 470 | 121.57 |
| DCDB-B007-B030 | 3/4X3 | 470 | 149.12 |
| DCDB-B010-B030 | 1X3 | 470 | 178.89 |
| DCDB-B015-B040 | 1-1/2X4 | 470 | 188.72 |
| DCDB-B020-B040 | 2X4 | 470 | 199.18 |
| DCDB-B030-B060 | 3X6 | 470 | 215.18 |
| DCDB-B040-B080 | 4X8 | 470 | 232.99 |
| DCDB-B060-B100 | 6X10 | 470 | 238.67 |
| DCDB-B080-B120 | 8X12 | 470 | 392.49 |

DC Isolation Coupler CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-C005-A020 | 1/2X2 | 470 | 48.81 |
| DCDB-C007-A030 | 3/4X3 | 470 | 65.46 |
| DCDB-C010-A030 | 1X3 | 470 | 66.19 |
| DCDB-C015-A040 | 1-1/2X4 | 470 | 77.68 |
| DCDB-C020-A040 | 2X4 | 470 | 108.65 |
| DCDB-C030-A060 | 3X6 | 470 | 175.95 |
| DCDB-C040-A080 | 4X8 | 470 | 296.51 |
| DCDB-C060-A100 | 6X10 | 470 | 456.36 |
| DCDB-C080-A120 | 8X12 | 470 | 502.71 |

DC Isolation Coupler CPVC Sch 80 x Sch 80 Gray

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-C005-B020 | 1/2X2 | 470 | 49.22 |
| DCDB-C007-B030 | 3/4X3 | 470 | 57.93 |
| DCDB-C010-B030 | 1X3 | 470 | 58.67 |
| DCDB-C015-B040 | 1-1/2X4 | 470 | 82.57 |
| DCDB-C020-B040 | 2X4 | 470 | 113.52 |
| DCDB-C030-B060 | 3X6 | 470 | 185.46 |
| DCDB-C040-B080 | 4X8 | 470 | 313.31 |
| DCDB-C060-B100 | 6X10 | 470 | 491.45 |
| DCDB-C080-B120 | 8X12 | 470 | 527.86 |

DC Isolation Coupler CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-C005-C020 | 1/2X2 | 470 | 100.04 |
| DCDB-C007-C030 | 3/4X3 | 470 | 110.61 |
| DCDB-C010-C030 | 1X3 | 470 | 232.54 |
| DCDB-C015-C040 | 1-1/2X4 | 470 | 252.55 |
| DCDB-C020-C040 | 2X4 | 470 | 282.76 |
| DCDB-C030-C060 | 3X6 | 470 | 366.68 |
| DCDB-C040-C080 | 4X8 | 470 | 373.97 |
| DCDB-C060-C100 | 6X10 | 470 | 625.17 |
| DCDB-C080-C120 | 8X12 | 470 | 972.03 |

DC Isolation Coupler CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCDB-C005-G020 | 1/2X2 | 470 | 105.83 |
| DCDB-C007-G030 | 3/4X3 | 470 | 116.47 |
| DCDB-C010-G030 | 1X3 | 470 | 241.97 |
| DCDB-C015-G040 | 1-1/2X4 | 470 | 330.91 |
| DCDB-C020-G040 | 2X4 | 470 | 361.85 |
| DCDB-C030-G060 | 3X6 | 470 | 384.54 |

NOT FOR USE WITH COMPRESSED AIR OR GAS


Made in the U.S.A.

Progressive Products from Spears® Innovation and Technology

Page 14



Termination Fittings

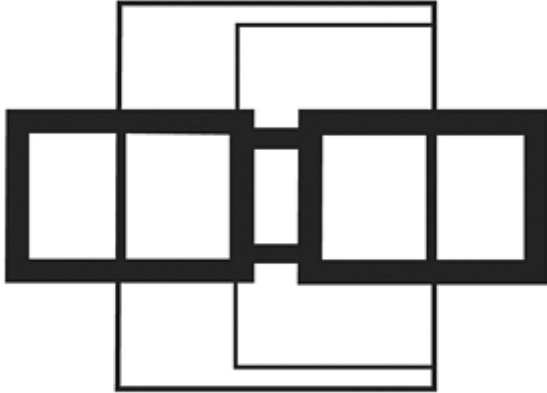

DC Termination Fittings are a special configuration for starting or stopping the containment portion of a system. Termination Fittings consist of a reducer coupling to accept the Containment pipe that is pre-fabricated to an internal extender coupling for connection to existing Carrier system. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Centralizers are used inside the Containment piping system, but not inside fittings, installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

DC Termination Fitting PVC Sch 40 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-A005-A020 | 1/2X2 | 470 | 109.07 |
| DCTM-A007-A030 | 3/4X3 | 470 | 114.76 |
| DCTM-A010-A030 | 1X3 | 470 | 120.19 |
| DCTM-A015-A040 | 1-1/2X4 | 470 | 129.74 |
| DCTM-A020-A040 | 2X4 | 470 | 136.21 |
| DCTM-A030-A060 | 3X6 | 470 | 185.83 |
| DCTM-A040-A080 | 4X8 | 470 | 242.39 |
| DCTM-A060-A100 | 6X10 | 470 | 458.93 |
| DCTM-A080-A120 | 8X12 | 470 | 742.37 |

DC Termination Fitting PVC Sch 40 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-A005-G020 | 1/2X2 | 470 | 141.95 |
| DCTM-A007-G030 | 3/4X3 | 470 | 232.28 |
| DCTM-A010-G030 | 1X3 | 470 | 233.12 |
| DCTM-A015-G040 | 1-1/2X4 | 470 | 292.77 |
| DCTM-A020-G040 | 2X4 | 470 | 299.33 |
| DCTM-A030-G060 | 3X6 | 470 | 464.41 |
| DCTM-A040-G080 | 4X8 | 470 | 741.47 |

DC Termination Fitting PVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-B005-A020 | 1/2X2 | 470 | 119.64 |
| DCTM-B007-A030 | 3/4X3 | 470 | 133.65 |
| DCTM-B010-A030 | 1X3 | 470 | 134.04 |
| DCTM-B015-A040 | 1-1/2X4 | 470 | 152.86 |
| DCTM-B020-A040 | 2X4 | 470 | 159.80 |
| DCTM-B030-A060 | 3X6 | 470 | 249.51 |
| DCTM-B040-A080 | 4X8 | 470 | 319.19 |
| DCTM-B060-A100 | 6X10 | 470 | 607.72 |
| DCTM-B080-A120 | 8X12 | 470 | 902.17 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Termination Fittings



DC Termination Fitting PVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-B005-G020 | 1/2X2 | 470 | 156.86 |
| DCTM-B007-G030 | 3/4X3 | 470 | 250.16 |
| DCTM-B010-G030 | 1X3 | 470 | 250.56 |
| DCTM-B015-G040 | 1-1/2X4 | 470 | 319.11 |
| DCTM-B020-G040 | 2X4 | 470 | 325.53 |
| DCTM-B030-G060 | 3X6 | 470 | 533.32 |
| DCTM-B040-G080 | 4X8 | 470 | 936.21 |

DC Termination Fitting PVC Sch 80 x PVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-B005-B020 | 1/2X2 | 470 | 135.73 |
| DCTM-B007-B030 | 3/4X3 | 470 | 169.09 |
| DCTM-B010-B030 | 1X3 | 470 | 169.49 |
| DCTM-B015-B040 | 1-1/2X4 | 470 | 193.98 |
| DCTM-B020-B040 | 2X4 | 470 | 200.91 |
| DCTM-B030-B060 | 3X6 | 470 | 326.35 |
| DCTM-B040-B080 | 4X8 | 470 | 406.02 |
| DCTM-B060-B100 | 6X10 | 470 | 927.82 |
| DCTM-B080-B120 | 8X12 | 470 | 1118.46 |

DC Termination Fitting CPVC Sch 80 x PVC Sch 40

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-C005-A020 | 1/2X2 | 470 | 120.39 |
| DCTM-C007-A030 | 3/4X3 | 470 | 135.17 |
| DCTM-C010-A030 | 1X3 | 470 | 141.10 |
| DCTM-C015-A040 | 1-1/2X4 | 470 | 169.94 |
| DCTM-C020-A040 | 2X4 | 470 | 181.94 |
| DCTM-C030-A060 | 3X6 | 470 | 291.64 |
| DCTM-C040-A080 | 4X8 | 470 | 379.01 |
| DCTM-C060-A100 | 6X10 | 470 | 767.69 |
| DCTM-C080-A120 | 8X12 | 470 | 1621.87 |

DC Termination Fitting CPVC Sch 80 x Sch 80 Gray

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-C005-B020 | 1/2X2 | 470 | 136.49 |
| DCTM-C007-B030 | 3/4X3 | 470 | 170.62 |
| DCTM-C010-B030 | 1X3 | 470 | 176.53 |
| DCTM-C015-B040 | 1-1/2X4 | 470 | 211.03 |
| DCTM-C020-B040 | 2X4 | 470 | 223.05 |
| DCTM-C030-B060 | 3X6 | 470 | 368.39 |
| DCTM-C040-B080 | 4X8 | 470 | 465.82 |
| DCTM-C060-B100 | 6X10 | 470 | 1088.78 |
| DCTM-C080-B120 | 8X12 | 470 | 1838.01 |

DC Termination Fitting CPVC Sch 80 x PVC Sch 40 Clear

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-C005-G020 | 1/2X2 | 470 | 162.89 |
| DCTM-C007-G030 | 3/4X3 | 470 | 268.98 |
| DCTM-C010-G030 | 1X3 | 470 | 279.41 |
| DCTM-C015-G040 | 1-1/2X4 | 470 | 366.64 |
| DCTM-C020-G040 | 2X4 | 470 | 378.66 |
| DCTM-C030-G060 | 3X6 | 470 | 640.86 |
| DCTM-C040-G080 | 4X8 | 470 | 970.33 |

DC Termination Fitting CPVC Sch 80 x CPVC Sch 80

| Part Number | Size | Disc Code | Price Each |
|----------------|---------|-----------|------------|
| DCTM-C005-C020 | 1/2X2 | 470 | 204.47 |
| DCTM-C007-C030 | 3/4X3 | 470 | 208.94 |
| DCTM-C010-C030 | 1X3 | 470 | 214.85 |
| DCTM-C015-C040 | 1-1/2X4 | 470 | 271.95 |
| DCTM-C020-C040 | 2X4 | 470 | 283.94 |
| DCTM-C030-C060 | 3X6 | 470 | 514.31 |
| DCTM-C040-C080 | 4X8 | 470 | 919.43 |
| DCTM-C060-C100 | 6X10 | 470 | 1399.35 |
| DCTM-C080-C120 | 8X12 | 470 | 2249.86 |

NOT FOR USE WITH COMPRESSED AIR OR GAS


Made in the U.S.A.

Progressive Products from Spears® Innovation and Technology

Page 16



Centralizers

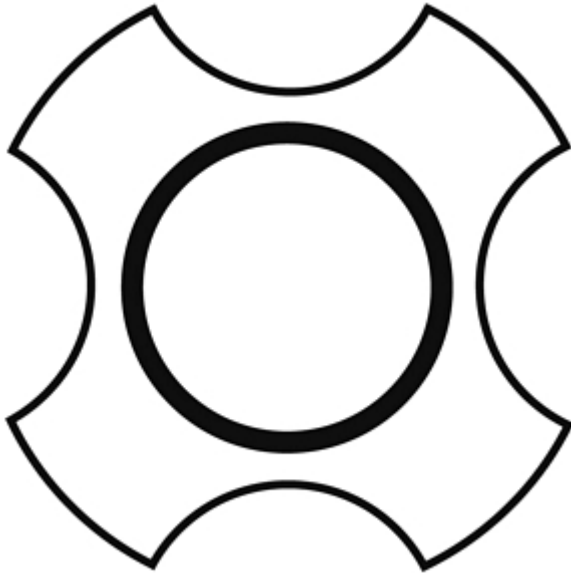

Centralizers are a simple slip-on design that are positioned and held in place by a few wraps of clean-room adhesive on each side. Centralizers hold the Carrier piping centrally located within the Containment piping and are designed with an annular space for routing of leak detection cable, if used. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

The following Spacing Chart can be used as a guide for determining the quantity of Centralizers needed, based on temperature and Carrier pipe size and schedule selected.

RECOMMENDED MINIMUM CENTRALIZER SUPPORT SPACING (ft.) *

| Carrier Size (in.) | PVC SCHEDULE 40 CARRIER Temperature °F | | | | | PVC SCHEDULE 80 CARRIER Temperature °F | | | | | CPVC SCHEDULE 80 CARRIER Temperature °F | | | | | |
|--------------------|---|--------|-------|-------|-------|---|--------|--------|-------|-------|--|--------|--------|--------|-------|-------|
| | 60° | 80° | 100° | 120° | 140° | 60° | 80° | 100° | 120° | 140° | 73° | 100° | 120° | 140° | 160° | 180° |
| 1/2 | 4-1/2 | 4-1/2 | 4 | 2-1/2 | 2-1/2 | 5 | 4-1/2 | 4-1/2 | 3 | 2-1/2 | 5-1/2 | 5 | 4-1/2 | 4-1/2 | 3 | 2-1/2 |
| 3/4 | 5 | 4-1/2 | 4 | 2-1/2 | 2-1/2 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 | 5-1/2 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 |
| 1 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 6 | 6 | 5-1/2 | 5 | 3-1/2 | 2 |
| 1-1/2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 6-1/2 | 6 | 5-1/2 | 3-1/2 | 3-1/2 | 7 | 6-1/2 | 6 | 5-1/2 | 3-1/2 | 3-1/2 |
| 2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 7 | 6-1/2 | 6 | 4 | 3-1/2 | 7 | 7 | 6-1/2 | 6 | 4 | 3-1/2 |
| 3 | 7 | 7 | 6 | 4 | 3-1/2 | 8 | 7-1/2 | 7 | 4-1/2 | 4 | 8 | 8 | 7-1/2 | 7 | 4-1/2 | 4 |
| 4 | 7-1/2 | 7 | 6-1/2 | 4-1/2 | 4 | 9 | 8-1/2 | 7-1/2 | 5 | 4-1/2 | 9 | 8-1/2 | 8 | 7-1/2 | 5 | 4-1/2 |
| 6 | 8-1/2 | 8 | 7-1/2 | 5 | 4-1/2 | 10 | 9-1/2 | 9 | 6 | 5 | 10 | 9-1/2 | 9 | 8 | 5-1/2 | 5 |
| 8 | 9 | 8-1/2 | 8 | 5 | 4-1/2 | 11 | 10-1/2 | 9-1/2 | 6-1/2 | 5-1/2 | 11 | 10-1/2 | 10 | 9 | 6 | 5-1/2 |
| 10 | 10 | 9 | 8-1/2 | 5-1/2 | 5 | 12 | 11 | 10 | 7 | 6 | 11-1/2 | 11 | 10-1/2 | 9-1/2 | 6-1/2 | 6 |
| 12 | 11-1/2 | 10-1/2 | 9-1/2 | 6-1/2 | 5-1/2 | 13 | 12 | 10-1/2 | 7-1/2 | 6-1/2 | 12-1/2 | 12 | 11-1/2 | 10-1/2 | 7-1/2 | 6-1/2 |

Note: Specified minimum spacing can also be used for system support according to the secondary Containment pipe size and schedule used. Where practical, system support should correspond to internal carrier support (centralizers) to minimize concentrated point loads.

* **Note:** Data furnished is based on raw material manufacturer's information. This information can be considered a reliable recommendation, but not a guarantee. Actual service conditions and system parameters should be evaluated by qualified personnel.

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Centralizers



DC Centralizer IPS O.D. x Sch 40 White I.D.

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
|-------------|------|-----------|------------|

Carrier x Containment

| | | | |
|----------------|---------|-----|-------|
| DCCT-H005-A020 | 1/2X2 | 470 | 12.57 |
| DCCT-H007-A030 | 3/4X3 | 470 | 13.99 |
| DCCT-H010-A030 | 1X3 | 470 | 13.99 |
| DCCT-H015-A040 | 1-1/2X4 | 470 | 18.15 |
| DCCT-H020-A040 | 2X4 | 470 | 18.15 |
| DCCT-H030-A060 | 3X6 | 470 | 23.19 |
| DCCT-H040-A080 | 4X8 | 470 | 28.65 |
| DCCT-H060-A100 | 6X10 | 470 | 37.17 |
| DCCT-H080-A120 | 8X12 | 470 | 46.67 |

DC Centralizer IPS O.D. x Sch 40 Clear I.D.

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
|-------------|------|-----------|------------|

Carrier x Containment

| | | | |
|----------------|---------|-----|-------|
| DCCT-H005-G020 | 1/2X2 | 470 | 12.57 |
| DCCT-H007-G020 | 3/4X2 | 470 | 12.57 |
| DCCT-H010-G030 | 1X3 | 470 | 13.99 |
| DCCT-H015-G040 | 1-1/2X4 | 470 | 18.15 |
| DCCT-H020-G040 | 2X4 | 470 | 18.15 |
| DCCT-H030-G060 | 3X6 | 470 | 23.19 |
| DCCT-H040-G080 | 4X8 | 470 | 28.65 |

DC Centralizer IPS O.D. x Sch 80 PVC I.D.

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
|-------------|------|-----------|------------|

Carrier x Containment

| | | | |
|----------------|---------|-----|-------|
| DCCT-H005-B020 | 1/2X2 | 470 | 12.57 |
| DCCT-H007-B020 | 3/4X2 | 470 | 12.57 |
| DCCT-H010-B030 | 1X3 | 470 | 13.99 |
| DCCT-H015-B040 | 1-1/2X4 | 470 | 18.15 |
| DCCT-H020-B040 | 2X4 | 470 | 18.15 |
| DCCT-H030-B060 | 3X6 | 470 | 23.19 |
| DCCT-H040-B080 | 4X8 | 470 | 28.65 |
| DCCT-H060-B100 | 6X10 | 470 | 37.17 |
| DCCT-H080-B120 | 8X12 | 470 | 46.67 |

DC Centralizer IPS O.D. x Sch 80 CPVC I.D.

| Part Number | Size | Disc Code | Price Each |
|-------------|------|-----------|------------|
|-------------|------|-----------|------------|

Carrier x Containment

| | | | |
|----------------|---------|-----|-------|
| DCCT-H005-C020 | 1/2X2 | 470 | 12.57 |
| DCCT-H007-C030 | 3/4X3 | 470 | 13.99 |
| DCCT-H010-C030 | 1X3 | 470 | 13.99 |
| DCCT-H015-C040 | 1-1/2X4 | 470 | 18.15 |
| DCCT-H020-C040 | 2X4 | 470 | 18.15 |
| DCCT-H030-C060 | 3X6 | 470 | 23.19 |
| DCCT-H040-C080 | 4X8 | 470 | 28.65 |
| DCCT-H060-C100 | 6X10 | 470 | 37.17 |
| DCCT-H080-C120 | 8X12 | 470 | 46.67 |


NOT FOR USE WITH COMPRESSED AIR OR GAS

Made in the U.S.A.

Progressive Products from Spears® Innovation and Technology



Ball Valve Box With Valve

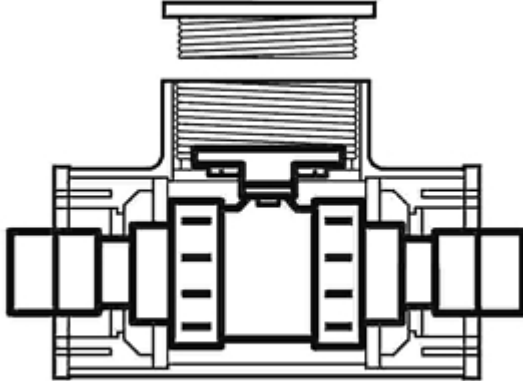

DC Ball Valve Boxes are made from a standard Spears® Tee fitting in designated material and Schedule selected, which is fitted with Carrier pipe size Ball Valve and bushed to specified Containment size. Includes Containment Valve Box fitting with threaded Access Plug, True Union 2000 Industrial Ball Valve with Lockout Handle and Centralizers for positioning valve in box. Carrier valves are equipped with extenders to facilitate cement assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

True Union 2000 Industrial Ball Valve Specifications, Sizes 1/2" - 2":

- Material: PVC/CPVC
- Seats: PTFE
- Seals: EPDM/Viton®
- PR, Water: 235 psi @ 73°F (23°C), 1/2" - 2"

Maximum Service Temperature
 PVC = 140°F (60°C)
 CPVC = 200°F (93°C)

Temperature/Pressure De-ratings Apply
 All Valves assembled with Silicone-Free,
 Water Soluble Lubricant

Contact Spears® for Pricing & Availability on Additional Sizes, Optional External Stem & Handle Extensions, Custom Elastomer Seals, or Seat & Seal Repair Kits

While Valve Boxes include Centralizers for valve, additional Centralizers are used inside the Containment piping system installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 40 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBA20-A005-A020 280.17 | VBA30-A005-A020 285.10 | 470 |
| 3/4X3 | VBA20-A007-A030 291.81 | VBA30-A007-A030 297.67 | 470 |
| 1X3 | VBA20-A010-A030 300.10 | VBA30-A010-A030 307.13 | 470 |
| 1-1/2X4 | VBA20-A015-A040 515.02 | VBA30-A015-A040 526.36 | 470 |
| 2X4 | VBA20-A020-A040 533.46 | VBA30-A020-A040 547.22 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 40 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-A005-G020 1242.77 | VBA30-A005-G020 1247.70 | 470 |
| 3/4X3 | VBA20-A007-G030 1251.12 | VBA30-A007-G030 1256.98 | 470 |
| 1X3 | VBA20-A010-G030 1261.31 | VBA30-A010-G030 1269.33 | 470 |
| 1-1/2X4 | VBA20-A015-G040 2268.18 | VBA30-A015-G040 2279.51 | 470 |
| 2X4 | VBA20-A020-G040 2302.65 | VBA30-A020-G040 2316.44 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBA20-B005-A020 294.02 | VBA30-B005-A020 298.96 | 470 |
| 3/4X3 | VBA20-B007-A030 306.10 | VBA30-B007-A030 311.95 | 470 |
| 1X3 | VBA20-B010-A030 316.41 | VBA30-B010-A030 323.33 | 470 |
| 1-1/2X4 | VBA20-B015-A040 546.81 | VBA30-B015-A040 558.15 | 470 |
| 2X4 | VBA20-B020-A040 601.50 | VBA30-B020-A040 615.29 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Ball Valve Box With Valve



Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-B005-G020 1252.68 | VBA30-B005-G020 1257.61 | 470 |
| 3/4X3 | VBA20-B007-G030 1265.48 | VBA30-B007-G030 1271.34 | 470 |
| 1X3 | VBA20-B010-G030 1275.73 | VBA30-B010-G030 1283.01 | 470 |
| 1-1/2X4 | VBA20-B015-G040 2296.95 | VBA30-B015-G040 2308.29 | 470 |
| 2X4 | VBA20-B020-G040 2331.80 | VBA30-B020-G040 2345.59 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-C005-B020 603.41 | VBA30-C005-B020 609.86 | 470 |
| 3/4X3 | VBA20-C007-B030 623.26 | VBA30-C007-B030 631.40 | 470 |
| 1X3 | VBA20-C010-B030 643.07 | VBA30-C010-B030 652.73 | 470 |
| 1-1/2X4 | VBA20-C015-B040 959.21 | VBA30-C015-B040 976.56 | 470 |
| 2X4 | VBA20-C020-B040 1015.54 | VBA30-C020-B040 1044.73 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBA20-B005-B020 419.35 | VBA30-B005-B020 592.76 | 470 |
| 3/4X3 | VBA20-B007-B030 600.65 | VBA30-B007-B030 606.51 | 470 |
| 1X3 | VBA20-B010-B030 610.21 | VBA30-B010-B030 616.91 | 470 |
| 1-1/2X4 | VBA20-B015-B040 791.62 | VBA30-B015-B040 803.07 | 470 |
| 2X4 | VBA20-B020-B040 929.63 | VBA30-B020-B040 943.51 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x CPVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-C005-C020 911.17 | VBA30-C005-C020 917.61 | 470 |
| 3/4X3 | VBA20-C007-C030 934.11 | VBA30-C007-C030 942.26 | 470 |
| 1X3 | VBA20-C010-C030 973.60 | VBA30-C010-C030 1747.81 | 470 |
| 1-1/2X4 | VBA20-C015-C040 1884.41 | VBA30-C015-C040 1900.66 | 470 |
| 2X4 | VBA20-C020-C040 1940.37 | VBA30-C020-C040 1969.56 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-C005-A020 316.55 | VBA30-C005-A020 323.00 | 470 |
| 3/4X3 | VBA20-C007-A030 328.66 | VBA30-C007-A030 336.81 | 470 |
| 1X3 | VBA20-C010-A030 348.53 | VBA30-C010-A030 358.18 | 470 |
| 1-1/2X4 | VBA20-C015-A040 617.20 | VBA30-C015-A040 649.64 | 470 |
| 2X4 | VBA20-C020-A040 663.34 | VBA30-C020-A040 1021.51 | 470 |


Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBA20-C005-G020 1268.20 | VBA30-C005-G020 1274.64 | 470 |
| 3/4X3 | VBA20-C007-G030 1288.04 | VBA30-C007-G030 1296.18 | 470 |
| 1X3 | VBA20-C010-G030 1307.85 | VBA30-C010-G030 1340.15 | 470 |
| 1-1/2X4 | VBA20-C015-G040 2356.90 | VBA30-C015-G040 874.20 | 470 |
| 2X4 | VBA20-C020-G040 2413.11 | VBA30-C020-G040 2442.31 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS



Ball Check Valve Box With Valve

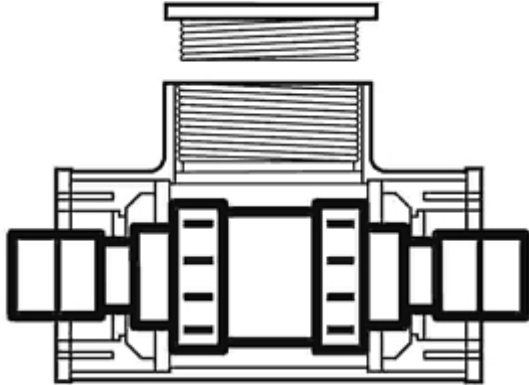

DC Ball Check Valve Boxes are made from a standard Spears® Tee fitting in designated material and Schedule selected, which is fitted with Carrier pipe size Ball Check Valve and bushed to specified Containment size. Includes Containment Valve Box fitting with threaded Access Plug, True Union 2000 Industrial Ball Check Valve and Centralizers for positioning valve in box. Carrier valves are equipped with extenders to facilitate cement assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

True Union 2000 Industrial Ball Check Valve Specifications, Sizes 1/2" - 2":

- Material: PVC/CPVC
- Seals: EPDM/Viton®
- PR, Water: 235 psi @ 73°F (23°C), 1/2" - 2"

Maximum Service Temperature
 PVC = 140°F (60°C)
 CPVC = 200°F (93°C)

Temperature/Pressure De-ratings Apply
 All Valves assembled with Silicone-Free,
 Water Soluble Lubricant

Contact Spears® for Pricing & Availability on Additional Sizes, Custom Elastomer Seals, or Seat & Seal Repair Kits

General Installation Information: Ball check valves may be installed in either horizontal or vertical position. A minimum of ten (10) pipe diameters' distance maintained from any pump or other source of turbulence. Check valves **MUST** be installed with the valve's FLOW arrow pointing in the direction of flow.

While Valve Boxes include Centralizers for valve, additional Centralizers are used inside the Containment piping system installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 40 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|---------------------------------|---------------------------------|-----------|
| 1/2X2 | VBC2-A005-A020 284.32 | VBC3-A005-A020 290.65 | 470 |
| 3/4X3 | VBC2-A007-A030 294.20 | VBC3-A007-A030 301.12 | 470 |
| 1X3 | VBC2-A010-A030 306.27 | VBC3-A010-A030 314.37 | 470 |
| 1-1/2X4 | VBC2-A015-A040 539.43 | VBC3-A015-A040 552.49 | 470 |
| 2X4 | VBC2-A020-A040 584.35 | VBC3-A020-A040 602.46 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 40 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBC2-A005-G020 1248.90 | VBC3-A005-G020 1254.33 | 470 |
| 3/4X3 | VBC2-A007-G030 1258.56 | VBC3-A007-G030 1265.48 | 470 |
| 1X3 | VBC2-A010-G030 1270.63 | VBC3-A010-G030 1278.76 | 470 |
| 1-1/2X4 | VBC2-A015-G040 2289.19 | VBC3-A015-G040 2302.26 | 470 |
| 2X4 | VBC2-A020-G040 2333.99 | VBC3-A020-G040 2352.10 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|---------------------------------|---------------------------------|-----------|
| 1/2X2 | VBC2-B005-A020 299.90 | VBC3-B005-A020 306.24 | 470 |
| 3/4X3 | VBC2-B007-A030 313.51 | VBC3-B007-A030 320.43 | 470 |
| 1X3 | VBC2-B010-A030 325.16 | VBC3-B010-A030 326.93 | 470 |
| 1-1/2X4 | VBC2-B015-A040 562.55 | VBC3-B015-A040 575.60 | 470 |
| 2X4 | VBC2-B020-A040 607.72 | VBC3-B020-A040 625.83 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Ball Check Valve Box With Valve



Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBC2-B005-G020 1259.24 | VBC3-B005-G020 1265.59 | 470 |
| 3/4X3 | VBC2-B007-G030 1272.85 | VBC3-B007-G030 1279.77 | 470 |
| 1X3 | VBC2-B010-G030 1284.50 | VBC3-B010-G030 575.60 | 470 |
| 1-1/2X4 | VBC2-B015-G040 2312.31 | VBC3-B015-G040 2325.36 | 470 |
| 2X4 | VBC2-B020-G040 2357.40 | VBC3-B020-G040 977.91 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBC2-C005-B020 619.01 | VBC3-C005-B020 627.35 | 470 |
| 3/4X3 | VBC2-C007-B030 638.17 | VBC3-C007-B030 647.99 | 470 |
| 1X3 | VBC2-C010-B030 660.07 | VBC3-C010-B030 671.62 | 470 |
| 1-1/2X4 | VBC2-C015-B040 949.48 | VBC3-C015-B040 969.19 | 470 |
| 2X4 | VBC2-C020-B040 1021.61 | VBC3-C020-B040 1048.91 | 470 |

Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|---------------------------------|---------------------------------|-----------|
| 1/2X2 | VBC2-B005-B020 594.47 | VBC3-B005-B020 600.13 | 470 |
| 3/4X3 | VBC2-B007-B030 608.07 | VBC3-B007-B030 614.99 | 470 |
| 1X3 | VBC2-B010-B030 619.71 | VBC3-B010-B030 436.35 | 470 |
| 1-1/2X4 | VBC2-B015-B040 914.56 | VBC3-B015-B040 927.62 | 470 |
| 2X4 | VBC2-B020-B040 959.79 | VBC3-B020-B040 977.89 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x CPVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBC2-C005-C020 980.18 | VBC3-C005-C020 988.53 | 470 |
| 3/4X3 | VBC2-C007-C030 999.47 | VBC3-C007-C030 1009.28 | 470 |
| 1X3 | VBC2-C010-C030 1021.23 | VBC3-C010-C030 1032.78 | 470 |
| 1-1/2X4 | VBC2-C015-C040 1775.41 | VBC3-C015-C040 1795.14 | 470 |
| 2X4 | VBC2-C020-C040 1839.97 | VBC3-C020-C040 1867.28 | 470 |

Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|---------------------------------|---------------------------------|-----------|
| 1/2X2 | VBC2-C005-A020 329.46 | VBC3-C005-A020 337.81 | 470 |
| 3/4X3 | VBC2-C007-A030 348.62 | VBC3-C007-A030 358.44 | 470 |
| 1X3 | VBC2-C010-A030 372.12 | VBC3-C010-A030 381.93 | 470 |
| 1-1/2X4 | VBC2-C015-A040 667.19 | VBC3-C015-A040 686.91 | 470 |
| 2X4 | VBC2-C020-A040 734.27 | VBC3-C020-A040 761.57 | 470 |


Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBC2-C005-G020 1257.77 | VBC3-C005-G020 1266.11 | 470 |
| 3/4X3 | VBC2-C007-G030 1303.10 | VBC3-C007-G030 1312.91 | 470 |
| 1X3 | VBC2-C010-G030 1324.85 | VBC3-C010-G030 1336.39 | 470 |
| 1-1/2X4 | VBC2-C015-G040 2389.95 | VBC3-C015-G040 2409.67 | 470 |
| 2X4 | VBC2-C020-G040 2457.02 | VBC3-C020-G040 2484.34 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS



Diaphragm Valve Box With Valve

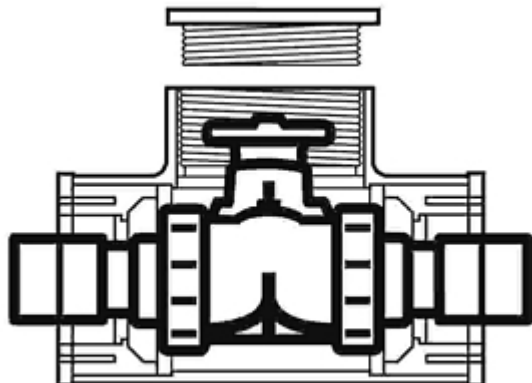

DC Diaphragm Valve Boxes are made from a standard Spears® Tee fitting in designated material and Schedule selected, which is fitted with Carrier pipe size Diaphragm Valve and bushed to specified Containment size. Includes Containment Valve Box fitting with threaded Access Plug, True Union Diaphragm Valve and Centralizers for positioning valve in box. Carrier valves are equipped with extenders to facilitate cement assembly. See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

True Union Diaphragm Valve Specifications, Sizes 1/2" - 2":

Material: PVC/CPVC
 Seals & Diaphragm: EPDM/Viton®
 PR, Water: 235 psi @ 73°F (23°C), 1/2" - 2"

Maximum Service Temperature
 PVC = 140°F (60°C)
 CPVC = 200°F (93°C)

Temperature/Pressure De-ratings Apply
 No Lubricants in Media Contact Area

Contact Spears® for Pricing & Availability on Additional Sizes, Elastomer Backed PTFE Diaphragms, or Diaphragm & Seal Repair Kits

While Valve Boxes include Centralizers for valve, additional Centralizers are used inside the Containment piping system installed on Carrier pipe and must be ordered separately according to same Carrier x Containment size and pipe schedule selected.

Valve Box, with PVC True Union Diaphragm Valve

PVC Sch 40 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBD20-A005-A020 361.63 | VBD30-A005-A020 375.18 | 470 |
| 3/4X3 | VBD20-A007-A030 378.43 | VBD30-A007-A030 393.82 | 470 |
| 1X3 | VBD20-A010-A030 411.46 | VBD30-A010-A030 428.33 | 470 |
| 1-1/2X4 | VBD20-A015-A040 701.57 | VBD30-A015-A040 743.57 | 470 |
| 2X4 | VBD20-A020-A040 752.28 | VBD30-A020-A040 811.13 | 470 |

Valve Box, with PVC True Union Diaphragm Valve

PVC Sch 40 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-A005-G020 1320.96 | VBD30-A005-G020 1334.52 | 470 |
| 3/4X3 | VBD20-A007-G030 1362.91 | VBD30-A007-G030 1378.31 | 470 |
| 1X3 | VBD20-A010-G030 1396.09 | VBD30-A010-G030 1412.96 | 470 |
| 1-1/2X4 | VBD20-A015-G040 2452.01 | VBD30-A015-G040 2494.01 | 470 |
| 2X4 | VBD20-A020-G040 2502.67 | VBD30-A020-G040 2561.52 | 470 |

Valve Box, with PVC True Union Diaphragm Valve

PVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|----------------------------------|-----------|
| 1/2X2 | VBD20-B005-A020 372.19 | VBD30-B005-A020 385.74 | 470 |
| 3/4X3 | VBD20-B007-A030 392.71 | VBD30-B007-A030 408.11 | 470 |
| 1X3 | VBD20-B010-A030 425.31 | VBD30-B010-A030 442.18 | 470 |
| 1-1/2X4 | VBD20-B015-A040 724.84 | VBD30-B015-A040 766.84 | 470 |
| 2X4 | VBD20-B020-A040 775.77 | VBD30-B020-A040 834.62 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Spears® Manufacturing Company

Diaphragm Valve Box With Valve



Valve Box, with PVC True Union Diaphragm Valve

PVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-B005-G020 1358.97 | VBD30-B005-G020 1372.52 | 470 |
| 3/4X3 | VBD20-B007-G030 1377.19 | VBD30-B007-G030 1392.59 | 470 |
| 1X3 | VBD20-B010-G030 1409.79 | VBD30-B010-G030 1426.66 | 470 |
| 1-1/2X4 | VBD20-B015-G040 2475.13 | VBD30-B015-G040 2517.13 | 470 |
| 2X4 | VBD20-B020-G040 2526.21 | VBD30-B020-G040 2585.06 | 470 |

Valve Box, with CPVC True Union Diaphragm Valve

CPVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-C005-B020 723.07 | VBD30-C005-B020 783.94 | 470 |
| 3/4X3 | VBD20-C007-B030 790.76 | VBD30-C007-B030 900.31 | 470 |
| 1X3 | VBD20-C010-B030 833.73 | VBD30-C010-B030 915.22 | 470 |
| 1-1/2X4 | VBD20-C015-B040 1242.54 | VBD30-C015-B040 1315.48 | 470 |
| 2X4 | VBD20-C020-B040 1277.50 | VBD30-C020-B040 1392.86 | 470 |

Valve Box, with PVC True Union Diaphragm Valve

PVC Sch 80 x PVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-B005-B020 666.73 | VBD30-B005-B020 680.30 | 470 |
| 3/4X3 | VBD20-B007-B030 687.21 | VBD30-B007-B030 702.61 | 470 |
| 1X3 | VBD20-B010-B030 719.79 | VBD30-B010-B030 736.66 | 470 |
| 1-1/2X4 | VBD20-B015-B040 1059.83 | VBD30-B015-B040 1101.83 | 470 |
| 2X4 | VBD20-B020-B040 1110.91 | VBD30-B020-B040 1169.76 | 470 |

Valve Box, with CPVC True Union Diaphragm Valve

CPVC Sch 80 x CPVC Sch 80

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-C005-C020 1034.68 | VBD30-C005-C020 1095.54 | 470 |
| 3/4X3 | VBD20-C007-C030 1101.61 | VBD30-C007-C030 1211.16 | 470 |
| 1X3 | VBD20-C010-C030 1144.53 | VBD30-C010-C030 1226.02 | 470 |
| 1-1/2X4 | VBD20-C015-C040 2026.94 | VBD30-C015-C040 2099.86 | 470 |
| 2X4 | VBD20-C020-C040 2061.89 | VBD30-C020-C040 2177.26 | 470 |

Valve Box, with CPVC True Union Diaphragm Valve

CPVC Sch 80 x PVC Sch 40

| Size | EPDM | Viton® | Disc Code |
|---------|----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-C005-A020 467.14 | VBD30-C005-A020 527.99 | 470 |
| 3/4X3 | VBD20-C007-A030 496.20 | VBD30-C007-A030 605.74 | 470 |
| 1X3 | VBD20-C010-A030 560.06 | VBD30-C010-A030 641.54 | 470 |
| 1-1/2X4 | VBD20-C015-A040 890.22 | VBD30-C015-A040 988.31 | 470 |
| 2X4 | VBD20-C020-A040 925.18 | VBD30-C020-A040 1040.54 | 470 |

Valve Box, with CPVC True Union Diaphragm Valve


CPVC Sch 80 x PVC Sch 40 Clear

| Size | EPDM | Viton® | Disc Code |
|---------|-----------------------------------|-----------------------------------|-----------|
| 1/2X2 | VBD20-C005-G020 1426.34 | VBD30-C005-G020 1487.20 | 470 |
| 3/4X3 | VBD20-C007-G030 1455.53 | VBD30-C007-G030 1565.09 | 470 |
| 1X3 | VBD20-C010-G030 1498.52 | VBD30-C010-G030 1580.00 | 470 |
| 1-1/2X4 | VBD20-C015-G040 2640.23 | VBD30-C015-G040 2712.84 | 470 |
| 2X4 | VBD20-C020-G040 2675.19 | VBD30-C020-G040 2790.55 | 470 |

NOT FOR USE WITH COMPRESSED AIR OR GAS



Clamp-on Saddles for Leak Detection Sensors

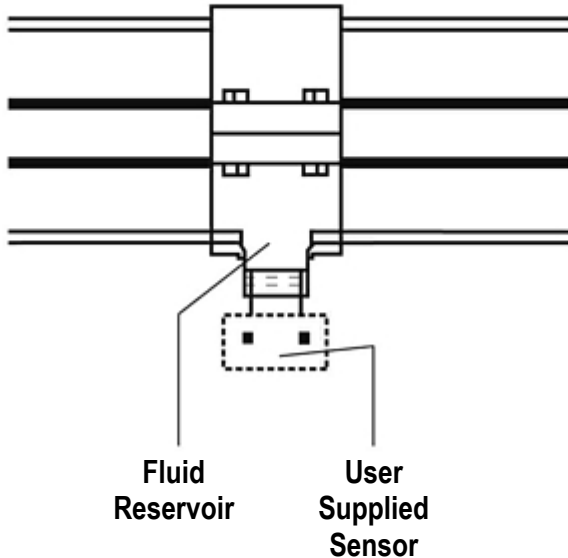

Leak Detection Sensor Saddles are special devices which can be installed on the Containment system where a "low-point" is desired for leak detection apparatus. Spears® Clamp-on style saddles feature an internal O-ring seal to allow easy installation anywhere on the containment piping. Saddles may also be used in Containment high points for air relief or for connection of Containment drainage valves (see note below). See *Double Containment Design & Installation Guide* at the end of this price schedule for proper installation.

Clamp-on Saddle Specifications, Containment sizes 2" - 8":

- Material: PVC White/PVC Gray/CPVC
- Seals: EPDM/Viton®
- Hardware: Stainless Steel (no fluid contact)
- Outlet: Special Reinforced (SR) Female Plastic thread 1/2" or 3/4" NPT (see note below)
- PR, Water: 235 psi @ 73°F (23°C), 2" - 4"
200 psi @ 73°F (23°C), 6"
150 psi @ 73°F (23°C), 8"
- Maximum Service Temperature
PVC = 140°F (60°C)
CPVC = 200°F (93°C)

Temperature/Pressure De-ratings Apply

Note: Saddles specified in this catalog are for listed containment pipe sizes through 8", with 1/2" or 3/4" NPT connections. For a wide variety of additional pipe and outlet sizes, including solvent weld outlets, please refer to Spears® catalog SDL-1, *PVC/CPVC Clamp-On & Hot-Tap Saddles*.

PVC White Clamp-On Saddle x SR Thread

| Part Number | Size | Hole Saw Dia | Disc Code | Price Each |
|--|-------|--------------|-----------|------------|
| with EPDM O-ring Seal & SS Hardware | | | | |
| 467SE-247SR | 2X1/2 | 3/4 | 046 | 50.84 |
| 467SE-248SR | 2X3/4 | 7/8 | 046 | 50.84 |
| 467SE-333SR ¹ | 3X1/2 | 7/8 | 046 | 68.23 |
| 467SE-334SR | 3X3/4 | 7/8 | 046 | 68.23 |
| 467SE-415SR ¹ | 4X1/2 | 1-1/8 | 046 | 85.61 |
| 467SE-416SR ¹ | 4X3/4 | 1-1/8 | 046 | 85.61 |
| 467SE-523SR ¹ | 6X1/2 | 1-1/8 | 046 | 143.86 |
| 467SE-524SR ¹ | 6X3/4 | 1-1/8 | 046 | 143.86 |
| 467SE-573SR ¹ | 8X1/2 | 4 | 046 | 206.39 |
| 467SE-574SR ¹ | 8X3/4 | 4 | 046 | 206.39 |
| 1-Outlet Sized with Adapter PVC White Saddles with Viton® O-ring seals available by special order | | | | |

PVC Gray Clamp-On Saddle x SR Thread

| Part Number | Size | Hole Saw Dia | Disc Code | Price Each |
|--|-------|--------------|-----------|------------|
| with EPDM O-ring Seal & SS Hardware | | | | |
| 867S-247SR | 2X1/2 | 3/4 | 086 | 54.88 |
| 867S-248SR | 2X3/4 | 7/8 | 086 | 54.88 |
| 867S-333SR ¹ | 3X1/2 | 7/8 | 086 | 73.79 |
| 867S-334SR | 3X3/4 | 7/8 | 086 | 73.79 |
| 867S-415SR ¹ | 4X1/2 | 1-1/8 | 086 | 92.90 |
| 867S-416SR ¹ | 4X3/4 | 1-1/8 | 086 | 92.90 |
| 867S-523SR ¹ | 6X1/2 | 1-1/8 | 086 | 134.30 |
| 867S-524SR ¹ | 6X3/4 | 1-1/8 | 086 | 134.30 |
| 867S-573SR ¹ | 8X1/2 | 4 | 086 | 249.03 |
| 867S-574SR ¹ | 8X3/4 | 4 | 086 | 249.03 |
| 1-Outlet sized with Adapter | | | | |

PVC Gray Clamp-On Saddle x SR Thread

| Part Number | Size | Hole Saw Dia | Disc Code | Price Each |
|--|-------|--------------|-----------|------------|
| with Viton® O-ring Seal & SS Hardware | | | | |
| 867SV-247SR | 2X1/2 | 3/4 | 086 | 61.41 |
| 867SV-248SR | 2X3/4 | 7/8 | 086 | 61.41 |
| 867SV-333SR ¹ | 3X1/2 | 7/8 | 086 | 82.10 |
| 867SV-334SR | 3X3/4 | 7/8 | 086 | 82.10 |
| 867SV-415SR ¹ | 4X1/2 | 1-1/8 | 086 | 103.66 |
| 867SV-416SR ¹ | 4X3/4 | 1-1/8 | 086 | 103.66 |
| 867SV-523SR ¹ | 6X1/2 | 1-1/8 | 086 | 152.26 |
| 867SV-524SR ¹ | 6X3/4 | 1-1/8 | 086 | 152.26 |
| 867SV-573SR ¹ | 8X1/2 | 4 | 086 | 272.10 |
| 867SV-574SR ¹ | 8X3/4 | 4 | 086 | 272.10 |
| 1-Outlet sized with Adapter | | | | |

NOT FOR USE WITH COMPRESSED AIR OR GAS

Clamp-on Saddles for Leak Detection Sensors



CPVC Gray Clamp-On Saddle x SR Thread

| Part Number | Size | Hole Saw Dia | Disc Code | Price Each |
|-------------|------|--------------|-----------|------------|
|-------------|------|--------------|-----------|------------|

with EPDM O-ring Seal & SS Hardware

| | | | | |
|--------------------------|-------|-------|-----|--------|
| 867S-247CSR | 2X1/2 | 3/4 | 096 | 91.91 |
| 867S-248CSR | 2X3/4 | 7/8 | 096 | 91.91 |
| 867S-333CSR ¹ | 3X1/2 | 7/8 | 096 | 123.03 |
| 867S-334CSR | 3X3/4 | 7/8 | 096 | 123.03 |
| 867S-415CSR ¹ | 4X1/2 | 1-1/8 | 096 | 154.84 |
| 867S-416CSR ¹ | 4X3/4 | 1-1/8 | 096 | 154.84 |
| 867S-523CSR ¹ | 6X1/2 | 1-1/8 | 096 | 258.07 |
| 867S-524CSR ¹ | 6X3/4 | 1-1/8 | 096 | 258.07 |
| 867S-573CSR | 8X1/2 | 4 | 096 | 458.47 |
| 867S-574CSR ¹ | 8X3/4 | 4 | 096 | 458.47 |

1-Outlet sized with Adapter

with Viton® O-ring Seal & SS Hardware

| | | | | |
|---------------------------|-------|-------|-----|--------|
| 867SV-247CSR | 2X1/2 | 3/4 | 096 | 102.33 |
| 867SV-248CSR | 2X3/4 | 7/8 | 096 | 102.33 |
| 867SV-333CSR ¹ | 3X1/2 | 7/8 | 096 | 137.47 |
| 867SV-334CSR | 3X3/4 | 7/8 | 096 | 137.47 |
| 867SV-415CSR ¹ | 4X1/2 | 1-1/8 | 096 | 173.69 |
| 867SV-416CSR ¹ | 4X3/4 | 1-1/8 | 096 | 173.69 |
| 867SV-523CSR ¹ | 6X1/2 | 1-1/8 | 096 | 289.48 |
| 867SV-524CSR ¹ | 6X3/4 | 1-1/8 | 096 | 289.48 |
| 867SV-573CSR ¹ | 8X1/2 | 4 | 096 | 498.68 |
| 867SV-574CSR ¹ | 8X3/4 | 4 | 096 | 498.68 |

1-Outlet sized with Adapter

NOT FOR USE WITH COMPRESSED AIR OR GAS

Made in the U.S.A.

Progressive Products from Spears® Innovation and Technology

Page 26




Expansion Joints For Carrier or Containment Piping

See the following Price Schedules for Expansion Joint selection:

80-1, PVC Schedule 80 Fittings, Unions, Flanges, Tank Adapters & Expansion Joints

-or-

80C-1, CPVC Schedule 80 Fittings, Unions, Flanges, Tank Adapters & Expansion Joints

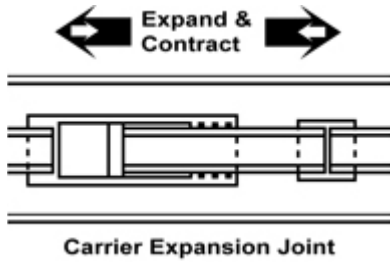

Temperature differentials can produce significant expansion and contraction changes between carrier pipe and containment pipe. These forces can severely damage system integrity. In addition to Spears® floating carrier design, Spears® in-line expansion joints can be used on either carrier or containment runs to compensate for expansion and contraction changes.

Select Expansion Joint Materials

Expansion Joints are available in the Price Schedules referenced above with 6" or 12" extension capacity, in both PVC and CPVC materials for use in either carrier or containment system piping. Choose either EPDM or Viton® seals with dual-wiper O-ring design.

Determine Travel Length Needed

System expansion and contraction are determined from anticipated temperature change in the system from both ambient and internal fluid temperatures.

General Rule of Thumb for All Pipe Diameters:

- PVC: allow 3/8" expansion for every 10°F change in temperature per 100 feet of pipe.
- CPVC: allow 1/2" expansion for every 10°F change in temperature per 100 feet of pipe.

For example, a 6" travel expansion joint will accommodate approximately 160°F temperature change in 100 ft. of PVC pipe (16 x 3/8" = 6") or approximately 120°F temperature change in 100 ft. of CPVC pipe (12 x 1/2" = 6").

Approximate Travel Length for Various Changes in System Temperature

| Temperature CHANGE | 10°F | 30°F | 50°F | 70°F | 90°F | 100°F | 120°F | 140°F | 160°F |
|---------------------------------------|------|--------|--------|--------|--------|--------|--------|--------|-------|
| | 6°C | 17°C | 28°C | 39°C | 50°C | 56°C | 67°C | 78°C | 89°C |
| PVC Length Change per 100 ft. | 3/8" | 1-1/8" | 1-7/8" | 2-5/8" | 3-3/8" | 3-3/4" | 4-1/2" | 5-1/4" | 6" |
| CPVC Length Change per 100 ft. | 1/2" | 1-1/2" | 2-1/2" | 3-1/2" | 4-1/2" | 5" | 6" | 7" | 8" |

Maximum Use Temperatures: PVC = 140°F (60°C); CPVC = 180°F (82°C)
Additional pressure deratings apply at elevated temperature


Important Note: Centralizers are not included with Expansion Joints. When used on Carrier piping, two (2) Centralizers for the appropriate Carrier x Containment size must be ordered separately to support each end of the unit.

NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide



Spears® Double Containment Systems are engineered for ease of installation and lower associated installation costs. Complete systems include all necessary components - carrier pipe, containment pipe, centralizer brackets, valves and valve boxes, plus a full assortment of simplified double containment configurations including elbows, tees, closure and termination fittings. Typical user-supplied components include leak detection cable and sensors, air relief valves, and solvent cement for assembly.

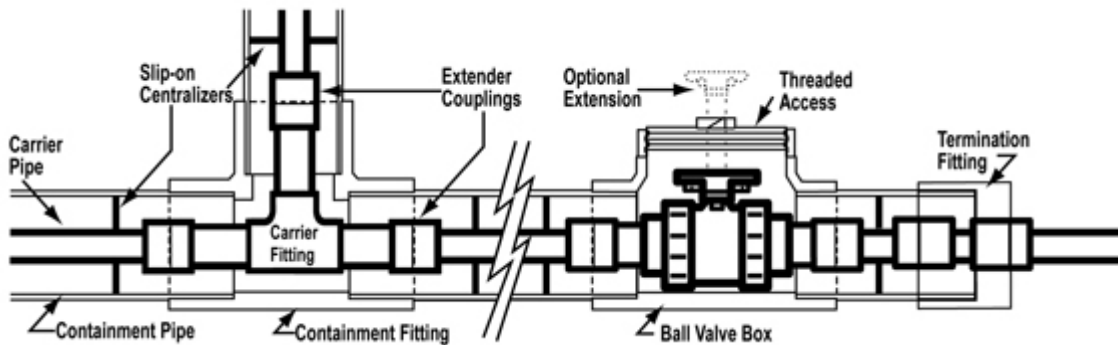

Successful installation requires proper design and planning of system layout, a basic understanding of how Spears® double containment fitting design works, and specific attention to a proper sequence of general assembly. This manual is designed as a general guide and may not address all situations encountered. Due to the variety of selected Carrier/ Containment combinations some design variations may occur.

PLEASE READ ALL INSTRUCTIONS PRIOR TO SYSTEM ASSEMBLY

CONTENTS

| | |
|--|----|
| Introduction & Contents | 28 |
| I. SYSTEM PLANNING & LAYOUT | 29 |
| II. DOUBLE CONTAINMENT FITTING & COMPONENT DESIGN OVERVIEW | 30 |
| III. PRODUCT RECEIVED | 31 |
| IV. GENERAL INSTALLATION ASSEMBLY | 32 |
| V. SPECIAL CLOSURE FITTING INSTALLATION | 35 |
| VI. ISOLATION COUPLER INSTALLATION | 37 |
| VII. IN-LINE VALVE BOX INSTALLATION | 38 |
| VIII. EXPANSION JOINT INSTALLATION | 38 |
| IX. SENSOR SADDLE INSTALLATION | 40 |
| X. PRESSURE TESTING SYSTEM | 40 |
| Appendix A: General Solvent Cement Welding Procedures | 41 |
| Appendix B: Sample Engineering Specification | 42 |

WARNING: USE OF COMPRESSED AIR OR GAS IN PVC OR CPVC PIPING SYSTEMS MAY RESULT IN SYSTEM DAMAGE OR SERIOUS OR FATAL BODILY INJURY.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Double Containment Design & Installation Guide

I. SYSTEM PLANNING & LAYOUT

The following issues need to be addressed in the planning stage of System Layout:

- **Carrier/Containment Combinations:** System primary carrier and secondary containment size, and material and pipe Schedule must be determined based on system temperature, pressure, and volume requirements. Carrier x Containment sizes and material/Schedule combinations are shown in the table below. Double containment systems can be custom produced to virtually any standard pipe size, material, or material combinations not shown, including multiple carriers in a single containment system. Contact Spears® Technical Services.

STANDARD CARRIER X CONTAINMENT COMBINATIONS

| Carrier x Containment Size | PVC Sch 40 x PVC Sch 40 | PVC Sch 40 x PVC Sch 40 Clear | PVC Sch 80 x PVC Sch 40 | PVC Sch 80 x PVC Sch 40 Clear | PVC Sch 80 x PVC Sch 80 | CPVC Sch 80 x PVC Sch 40 | CPVC Sch 80 x CPVC Sch 80 | CPVC Sch 80 x PVC Sch 40 Clear |
|-------------------------------------|-------------------------------|--|-------------------------------|--|-------------------------------|--------------------------------|---------------------------------|---|
| 1/2 x 2 | • | • | • | • | • | • | • | • |
| 3/4 x 3 | • | • | • | • | • | • | • | • |
| 1 x 3 | • | • | • | • | • | • | • | • |
| 1-1/2 x 4 | • | • | • | • | • | • | • | • |
| 2 x 4 | • | • | • | • | • | • | • | • |
| 3 x 6 | • | • | • | • | • | • | • | • |
| 4 x 8 | • | • | • | • | • | • | • | • |
| 6 x 10 | • | N/A | • | N/A | • | • | • | N/A |
| 8 x 12 | • | N/A | • | N/A | • | • | • | N/A |

N/A = Not available in specified size and material

System Support: The system must be supported according to standard pipe support methods and criteria for installation of the Containment-size pipe. Where practical, system support should align with internal carrier support (centralizers) to reduce concentrated point loads.

- **Caution:** System must be designed so that if carrier fails (leaks), the Containment pipe must not be pressurized beyond 10 psi pressure. An extremely hazardous condition can result from the air in the containment pipe becoming compressed. An air relief valve can be used or a vent to a containment vessel can be installed.
- **Thermal Expansion & Contraction:** Both Containment and Carrier system expansion and contraction must be determined, just like any other system. This is especially important where significantly different fluid temperatures are anticipated between the Carrier system and the Containment system. The primary line must be designed to allow for expansion & contraction due to process media temperature. The secondary line must be designed to accommodate temperature changes, especially in above ground installation where environmental factors will affect the temperature of the pipe.
- **Containment Thrust Blocking:** Adequate thrust blocking must be determined for the system and related loads.
- **Termination Points:** Must be determined for both start and end of Containment portion of the system.
- **Leak Detection Sensors, Drains, Valve Box, etc.:** Location and type must be determined (i.e. ball valve, gate valve, etc.)

NOT FOR USE WITH COMPRESSED AIR OR GAS


Double Containment Design & Installation Guide




II. DOUBLE CONTAINMENT FITTING & COMPONENT DESIGN OVERVIEW

A basic understanding of Spears® double containment fitting and component design will make assembly much easier. Additional details of their application is found in each specific installation section.


- General configurations (elbows, tees, etc.) of Spears® double containment fittings consist of separate internal Carrier and external Containment fittings of the same configuration. Carrier fittings (except standard couplings) are equipped with extenders to facilitate cement assembly. Centralizers are used inside the Containment piping system, but not inside fittings in order to; 1) allow movement of the Carrier assembly inside the Containment system during expansion and contraction; and 2) allow the Carrier assembly to be more easily cemented before cementing the Containment assembly. NOTE: Certain configurations may require oversized containment fittings bushed to specified containment pipe size in order to accommodate specified carrier fitting configurations.




- Most double containment fitting configurations (where practical) are designed with dimensions that bring the pipe stop of the Carrier fitting flush to the face of the socket of the Containment fitting. This facilitates solvent cementing and determination of Carrier and Containment pipe cut lengths. On each pipe run, the Carrier pipe cut length is equal to the face-to-face distance between Containment fittings. The Containment pipe cut length is equal to the Carrier pipe length plus two (2) Containment pipe socket lengths.



- Termination Fittings are a special configuration for starting or stopping the containment portion of a system. Termination fittings will consist of a reducer coupling to accept the Containment pipe that is pre-fabricated to an internal extender coupling for connection to existing carrier system, thereby terminating (start or stop) the secondary containment portion of the system.



- System installation is best accomplished by consecutive assembly from a starting point to the end of the system. In situations where runs of Carrier and Containment system must meet, the Closure Fitting is a special coupling configuration for joining both Carrier and Containment piping. Closure Fittings are frequently used at the end of a system where the final Termination Fitting must connect to a fixed point in the system.

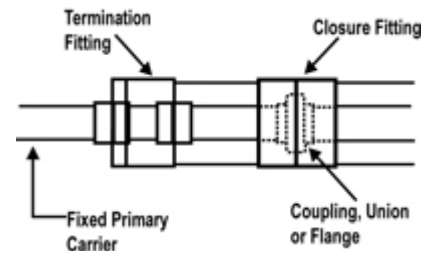


NOT FOR USE WITH COMPRESSED AIR OR GAS




Double Containment Design & Installation Guide

- Centralizers are a simple slip-on design which are positioned and held in place by a few wraps of Clean-room adhesive on each side. Centralizers hold the Carrier piping centrally located within the Containment piping and are designed with an annular space for routing of leak detection cable, if used.




- In-Line Ball Valve Boxes are a pre-assembled "Tee-style" configuration with a valve installed for connection to Carrier and Containment piping. A threaded access is provided through the tee-box branch. Valve handle extensions through the cap are available as an option.


NOTE: Tee-style valve boxes are normally over specified containment pipe size and bushed down in order to accommodate carrier valve.



- Sensor Saddles are special devices which can be installed on the Containment system where a "low-point" is desired for leak-detection apparatus. Saddles may also be used in Containment piping high points for air relief or for connection of Containment drainage valves.

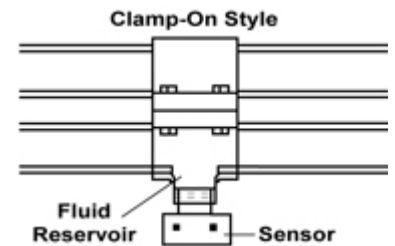

- Expansion Joints are designed to accommodate linear thermal expansion and contraction in thermoplastic systems using an O-ring sealed internal piston. These units can be used on either primary Carrier or secondary Containment portions of the system, especially where a significant temperature differential exists between the two. Expansion Joints also double as an adjustable coupling or repair coupling for making pipe connections.



- Additional specialty configurations can be custom produced according to user requirements.



Carrier Expansion Joint

III. PRODUCT RECEIVED

Carrier and Containment pipe are sold and shipped separate from each other in standard stock 20-foot lengths. Finished cut lengths are prepared by the user at time of installation.

Likewise, each configuration of a double containment fitting is shipped with Carrier and Containment fittings separately, except special configurations that require factory pre-assembly. Upon receipt, each double containment configuration (Carrier fitting and Containment fitting) should be matched up in preparation for installation.

NOT FOR USE WITH COMPRESSED AIR OR GAS




IV. GENERAL INSTALLATION ASSEMBLY

Important: Proper solvent cementing procedures must be followed. See Appendix A


Termination Fitting - The Proper Starting Point

Where practical, it is easiest to start using a Termination fitting. This special fitting terminates (start/stop) the secondary Containment portion of the system. The Termination fitting is assembled to the existing primary piping system which continues as the Carrier in the double containment portion of the system and provides a connection for starting (or ending) the Containment piping.

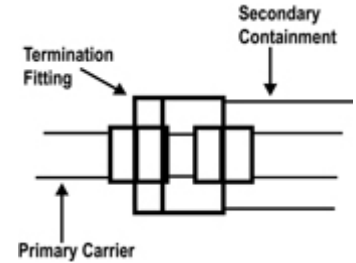

Step 1: Install Termination Fitting to Primary Carrier Pipe

Using proper dauber size, cement Termination Fitting to the primary carrier piping.



Step 2: Cut Carrier & Containment Pipe Lengths

Important: All pipe MUST be cut square and properly deburred and beveled.

1. **Carrier Pipe Cut Length:** Determine the distance between the Containment socket end face of the first fitting to the socket end face of the next Containment fitting and cut Carrier pipe to that length.

Note: This dimension can be calculated from system centerlines as follows:


$$L_{car} = D - (C1 + C2)$$

Where: L_{car} = Carrier Pipe Cut Length

D = Centerline to Centerline distance between Containment fittings

$C1$ = Centerline to socket end of first Containment fitting

$C2$ = Centerline to socket end of second Containment fitting

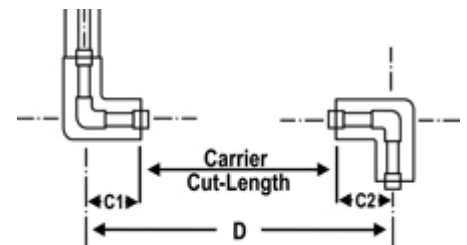

2. **Containment Pipe Cut Length:** Add the socket lengths for each of the two (2) connecting Containment fittings to the Carrier pipe cut length and cut the Containment pipe to that length.

Note: This dimension can be calculated as follows:


$$L_{con} = L_{car} + S1 + S2$$

Where: L_{con} = Containment Pipe Cut Length

L_{car} = Carrier Pipe Cut Length

$S1$ = Socket Length of first Containment fitting

$S2$ = Socket Length of second Containment fitting

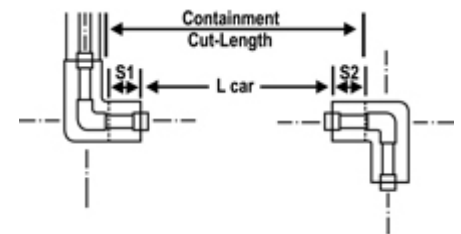

COUPLING NOTE: Regular couplings do not come with extenders. Where a continuation of a straight pipe run is made with a coupling on carrier or containment pipe, use the overall coupled length in the above calculations. Special allowances should also be made for Closure Fittings and Expansion Joints in determining cut lengths.



Double Containment Design & Installation Guide

Step 3: Assemble Slip-On Centralizers

The chart below shows recommended Centralizer support spacing according to Carrier pipe size, material and Schedule at specified operating temperature for liquids up to 1.00 specific gravity, but does not include concentrated loads (see chart note on double containment system support).



RECOMMENDED MINIMUM CENTRALIZER SUPPORT SPACING (ft.) *

| Carrier Size (in.) | PVC SCHEDULE 40 CARRIER Temperature °F | | | | | PVC SCHEDULE 80 CARRIER Temperature °F | | | | | CPVC SCHEDULE 80 CARRIER Temperature °F | | | | | |
|--------------------|---|--------|-------|-------|-------|---|--------|--------|-------|-------|--|--------|--------|--------|-------|-------|
| | 60° | 80° | 100° | 120° | 140° | 60° | 80° | 100° | 120° | 140° | 73° | 100° | 120° | 140° | 160° | 180° |
| 1/2 | 4-1/2 | 4-1/2 | 4 | 2-1/2 | 2-1/2 | 5 | 4-1/2 | 4-1/2 | 3 | 2-1/2 | 5-1/2 | 5 | 4-1/2 | 4-1/2 | 3 | 2-1/2 |
| 3/4 | 5 | 4-1/2 | 4 | 2-1/2 | 2-1/2 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 | 5-1/2 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 |
| 1 | 5-1/2 | 5 | 4-1/2 | 3 | 2-1/2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 6 | 6 | 5-1/2 | 5 | 3-1/2 | 2 |
| 1-1/2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 6-1/2 | 6 | 5-1/2 | 3-1/2 | 3-1/2 | 7 | 6-1/2 | 6 | 5-1/2 | 3-1/2 | 3-1/2 |
| 2 | 6 | 5-1/2 | 5 | 3-1/2 | 3 | 7 | 6-1/2 | 6 | 4 | 3-1/2 | 7 | 7 | 6-1/2 | 6 | 4 | 3-1/2 |
| 3 | 7 | 7 | 6 | 4 | 3-1/2 | 8 | 7-1/2 | 7 | 4-1/2 | 4 | 8 | 8 | 7-1/2 | 7 | 4-1/2 | 4 |
| 4 | 7-1/2 | 7 | 6-1/2 | 4-1/2 | 4 | 9 | 8-1/2 | 7-1/2 | 5 | 4-1/2 | 9 | 8-1/2 | 8 | 7-1/2 | 5 | 4-1/2 |
| 6 | 8-1/2 | 8 | 7-1/2 | 5 | 4-1/2 | 10 | 9-1/2 | 9 | 6 | 5 | 10 | 9-1/2 | 9 | 8 | 5-1/2 | 5 |
| 8 | 9 | 8-1/2 | 8 | 5 | 4-1/2 | 11 | 10-1/2 | 9-1/2 | 6-1/2 | 5-1/2 | 11 | 10-1/2 | 10 | 9 | 6 | 5-1/2 |
| 10 | 10 | 9 | 8-1/2 | 5-1/2 | 5 | 12 | 11 | 10 | 7 | 6 | 11-1/2 | 11 | 10-1/2 | 9-1/2 | 6-1/2 | 6 |
| 12 | 11-1/2 | 10-1/2 | 9-1/2 | 6-1/2 | 5-1/2 | 13 | 12 | 10-1/2 | 7-1/2 | 6-1/2 | 12-1/2 | 12 | 11-1/2 | 10-1/2 | 7-1/2 | 6-1/2 |

Note: Specified minimum spacing can also be used for system support according to the secondary Containment pipe size and schedule used. Where practical, system support should correspond to internal carrier support (centralizers) to minimize concentrated point loads.


* **Note:** Data furnished is based on raw material manufacturer's information. This information can be considered a reliable recommendation, but not a guarantee. Actual service conditions and system parameters should be evaluated by qualified personnel.

Assemble Centralizers to Carrier pipe as required (see chart above) holding in place with a loop of Clean-room adhesive over one flat side of each Centralizer followed by 3-wraps of adhesive around Carrier pipe on each side of Centralizer to hold loop. Orient so that the flat sides of all Centralizers align. On horizontal runs, the flat side should also lay parallel to the ground to accommodate any sensor wire used.

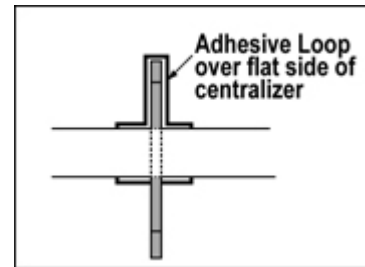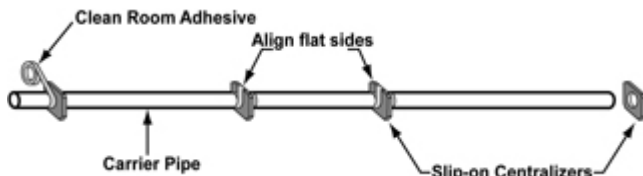

Step 4: Assemble Carrier Pipe Run Into Containment Pipe Run

Insert Carrier pipe run with Centralizers into Containment pipe run while feeding sensor wire through and under Centralizers as required.

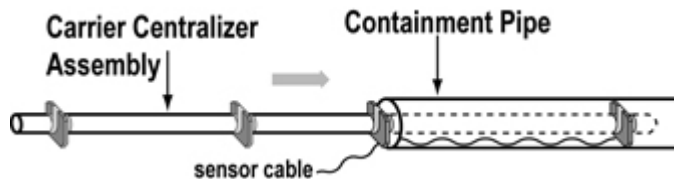


NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide



Step 5: Solvent Cement Start of Carrier & Containment Run


Position double containment pipe assembly and pull Carrier pipe out enough to allow joint make-up. Using proper dauber size, cement Carrier pipe to first Carrier (or Termination) fitting being sure to properly orient Centralizers. Using a different size dauber if necessary, cement Containment pipe and slide into first Containment (or Termination) fitting.

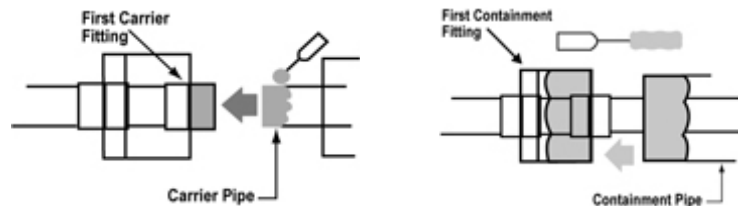


Step 6: Solvent Cement Next Carrier & Containment Run

At the opposite end of the run, install the next carrier and containment fitting assembly. **Important Note:** Certain carrier x containment sizes and configurations (such as elbows) may require cementing and installation of both fittings at the same time. A dry fit check of both fittings should be made to verify that there is clearance to slide the Containment fitting over the Carrier fitting once the Carrier fitting has been cemented to the carrier pipe. In such cases, slide the Containment fitting back as much as possible and apply cement to both Carrier pipe and extender coupling and to both Containment pipe and Containment fitting using appropriate size daubers. Immediately assemble next Carrier fitting to Carrier pipe and Containment fitting to Containment pipe being sure to align properly. Note: This process must be done quickly to prevent cement from drying out before assembly.

Other size and configuration combinations allow Containment fitting to be installed after Carrier fitting is in place. In such cases, slide Containment fitting away from Carrier fitting and cement Carrier pipe to next Carrier fitting, using proper dauber size. Slide next Containment fitting back over Carrier assembly and cement Containment pipe to next Containment fitting, using a different size dauber if necessary. For tees or crosses, where possible, always cement the run double containment assembly before the branch.



Important Note: Some Tees are shipped with the Carrier Tee branch socket extension separated from the Carrier Tee assembly to allow easy movement of the Carrier fitting to facilitate assembly, as shown below. The Carrier Tee branch extension must be **cemented in place** after the run Carrier Tee assembly is completed.

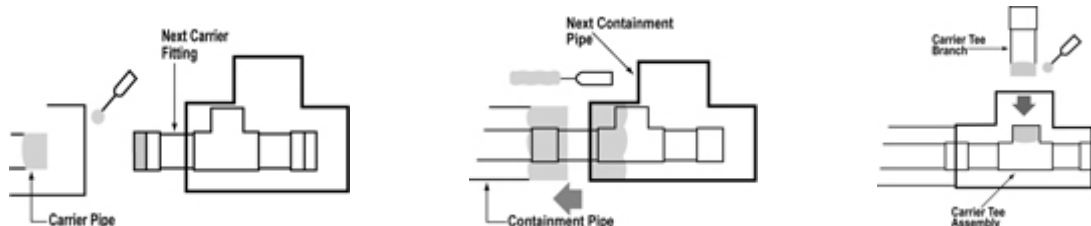

Repeat Steps 2 through 6 above to consecutively assemble each additional section of the Double Containment System. Finish with installation of an additional Termination Fitting. See following instructions on Closure Fittings or on Expansion Joints for joining Double Containment system sections which must meet.


NOT FOR USE WITH COMPRESSED AIR OR GAS




Double Containment Design & Installation Guide

V. SPECIAL CLOSURE FITTING INSTALLATION

Closure Fittings are a special split coupling for joining meeting runs of Containment piping such as before the final Termination Fitting. Closure Fittings consists of 1 male Closure Fitting and 1 female Closure Fitting. An internal O-ring on each component serves as a "cement-wiper" during installation to assure a proper joint. A one-step type cement should be used to facilitate rapid assembly.

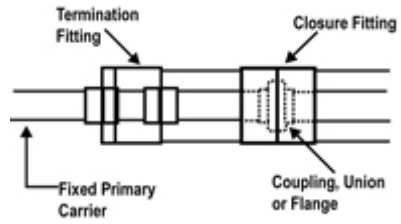

Typical Closure Fitting Use

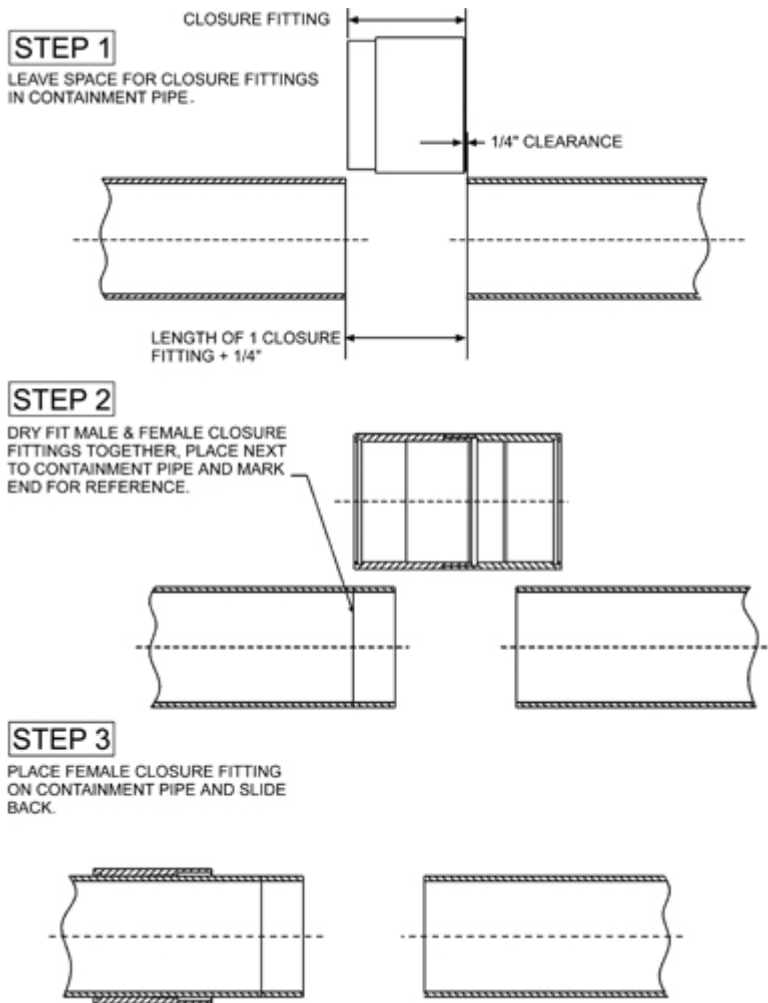


NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide




STEP 4

PLACE MALE CLOSURE FITTING ON CONTAINMENT PIPE AND SLIDE BACK.

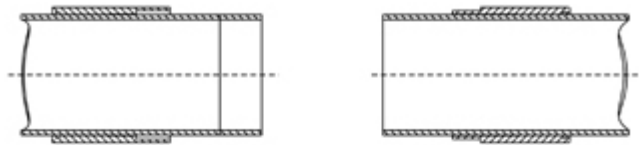


STEP 5

COMPLETE CARRIER PIPE. IF SUFFICIENT MOVEMENT FOR A SOCKET JOINT CANNOT BE MADE, A UNION, FLANGE OR EXPANSION JOINT MAY BE REQUIRED.




STEP 6

USE ONE-STEP CEMENT ON FEMALE CONTAINMENT PIPE. APPLY WELL PAST MARK ON PIPE. O-RING WILL WIPE OFF EXCESS. SLIDE CLOSURE FITTING FORWARD TO MARK ON PIPE MADE IN (STEP 2) LET CEMENT CURE BEFORE CONTINUING TO NEXT STEP.



STEP 7

USE ONE-STEP CEMENT ON CONTAINMENT PIPE. APPLY WELL PAST WHERE THE END OF CLOSURE FITTING WILL BE INSTALLED. ALSO CEMENT MALE PORTION OF CLOSURE FITTING AND INSIDE THE MATING FEMALE JOINT. SLIDE MALE FITTING INTO FEMALE FITTING AND CLAMP WITH A BAR OR PIPE-TYPE CLAMP.






Double Containment Design & Installation Guide

VI. ISOLATION COUPLER INSTALLATION

The purpose of the Isolation Coupler is to isolate a containment section for improved location identification if a leak is detected. To accomplish this, the Isolation Coupler has a partition in the Containment section fixed to the Carrier section.


Step 1: Solvent Cement Isolation Coupler on Carrier and Containment Pipe Run

This coupler requires cementing of both primary Carrier and Containment joints at the same time. Using the right size dauber, cement both sockets on one end of the Isolation Coupler and both pipe ends of the Carrier and Containment pipe run. Assemble both joints immediately. Note: This process must be done quickly to prevent cement from drying out before assembly.

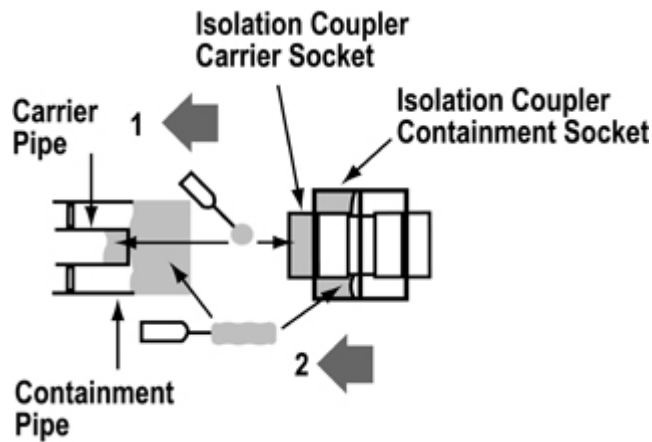

Step 2: Solvent Cement Start of Next Carrier & Containment Run

Position the next double containment pipe and centralizer assembly and pull Carrier pipe out enough to allow joint make-up. Using proper dauber size, cement Carrier pipe to Carrier socket of Isolation Coupler being sure to properly orient Centralizers. Using a different size dauber if necessary, cement Containment pipe and slide into Containment socket of the Isolation Coupler.

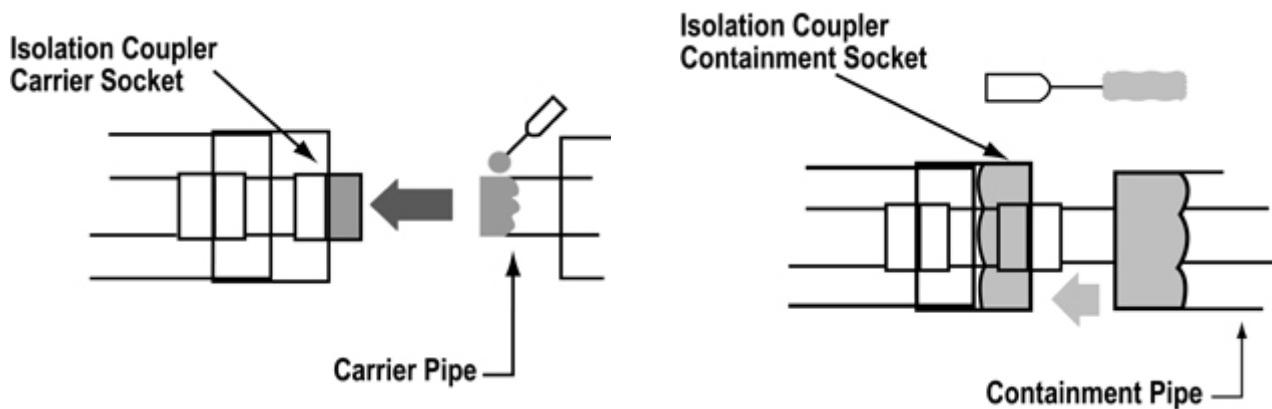


NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide




VII. IN-LINE VALVE BOX INSTALLATION

Tee-style valve boxes come with Spears® True Union 2000 style ball valves or ball check valves installed. Centralizers are pre-installed in box to give support to the valve. In-Line Valve Boxes are constructed in a larger diameter than the secondary containment system in order to accommodate the appropriate valve for the carrier system. These are fitted with reducers for connection to the containment system. Valve boxes can be ordered with stem extensions for exterior operation of valve. Ball and Ball Check Valves are available for use with Carrier pipe sizes 1/2" through 4", PVC or CPVC using EPDM or genuine Viton® seals. Other valve types available on request.

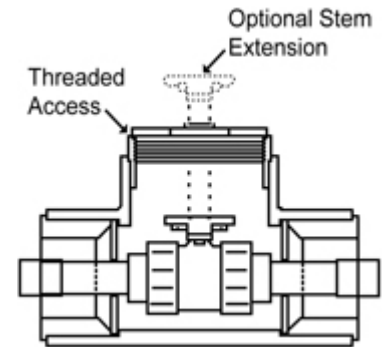

Using appropriate size daubers, apply cement to both Carrier pipe and extender coupling and to both Containment pipe and Valve Box Containment enclosure. Assemble immediately being sure to apply pressure to the opposite end extender coupling to seat Carrier connection.

Note: This process must be done quickly to prevent cement from drying out before assembly. A one-step type cement is recommended for this installation.

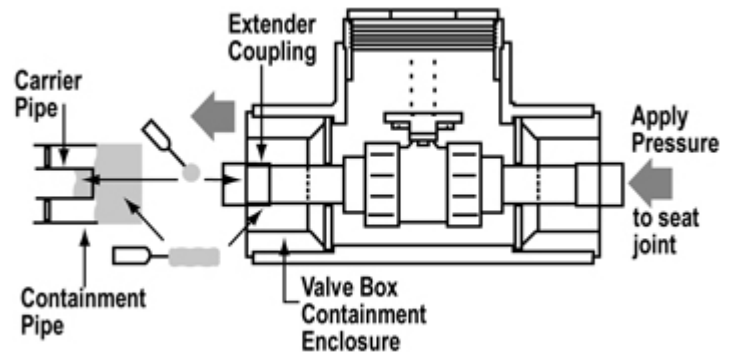


VIII. EXPANSION JOINT INSTALLATION

Expansion Joints can be used to compensate for linear thermal expansion in Carrier or Containment portions of the system. Expansion Joints are available in either 6" or 12" extension lengths.

Step 1: Determine Travel Length Needed

General Rule: For PVC systems, allow 3/8" expansion for every 10° F change in temperature per 100 feet of pipe (all diameters). For CPVC systems, allow 1/2" expansion for every 10° F change in temperature per 100 feet of pipe (all diameters). For example, a 6" travel expansion joint will accommodate approximately 160°F temperature change in 100 ft. of PVC pipe ($16 \times 3/8" = 6"$) or approximately 120°F temperature change in 100 ft. of CPVC pipe ($12 \times 1/2" = 6"$).

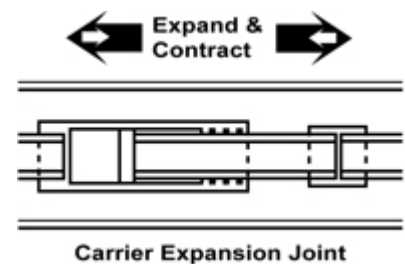

NOT FOR USE WITH COMPRESSED AIR OR GAS



Double Containment Design & Installation Guide

Step 2: Support & Thrust Block

ON SECONDARY CONTAINMENT PIPING: For proper operation, the outer tube of the Expansion Joint should be firmly anchored to allow free movement of the inner tube or "piston." Alignment is critical. Support and thrust block the system to direct movement squarely into the Expansion Joint. Axial guides should be installed to ensure straight movement into Expansion Joint; again, alignment is critical. Provisions should be made to protect the cylinder shaft from scratches, damage and debris in order to prevent leaks.

ON PRIMARY CARRIER PIPING: A Centralizer bracket should be located at each end of the Expansion Joint to serve as an axial guide to ensure straight movement into Expansion Joint. Protect the cylinder shaft from scratches, damage and debris during installation.

Step 3: Install Expansion Joint in Line

Determine installed extension length and solvent cement unit in system. Expansion Joints can be installed at the travel range midpoint for most general installations and are shipped from the factory in this position. If desired, the extended position for installation may be additionally adjusted to specific system and installation parameters using the following calculation:

| | |
|---------------|---|
| T-A | T = Maximum Temperature of Pipe Exposure |
| ----- × E = P | A = Temperature of Pipe at time of Installation |
| T-F | E = Maximum Expansion Joint Travel (6" or 12") |
| | P = Piston Extension for Installation Position (inches) |
| | F = Minimum Temperature of Pipe Exposure |

Example: A straight run of pipe will operate at temperatures between 60°F and 110°F. Temperature at time of installation is 75°F using a 6" travel Expansion Joint.

| | |
|---------------|---|
| T-A | 110-75 |
| ----- × E = P | ----- × 6 = 4.2 inches extended at installation |
| T-F | 110-60 |

Supplemental Information Notes:

| | |
|--|---|
| Maximum operating temperature: | PVC = 140°F |
| | CPVC = 180°F |
| Coefficient of Linear Thermal Expansion: | PVC 1120 = 2.8 x 10 ⁻⁵ in/in/°F |
| | CPVC 4120 = 3.4 x 10 ⁻⁵ in/in/°F |


NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide



IX. SENSOR SADDLE INSTALLATION

PVC and CPVC Sensor Saddles are available in Clamp-On type with O-ring seal for Containment pipe sizes 2" through 6" or in Glue-On style for Containment pipe sizes 1/2" and larger. Specify branch outlet size in thread or socket connection. Sensor Saddles should be installed in a low point along a Containment pipe run for collection of any fluid leakage. Install user-supplied sensor device. Saddles may also be used in Containment piping high points for air relief or for connection of Containment drainage valves.

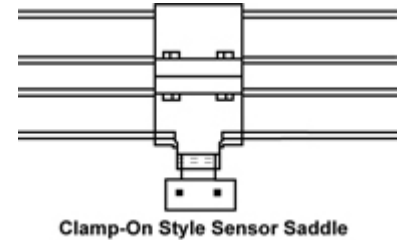

Clamp-On style Saddle Installation

1. Using a standard industrial-grade hole saw, cut specified hole in desired position on pipe according to recommended hole saw size engraved on saddle. Note: Care must be taken to deburr hole and remove all residue from hole area to assure tight fit and avoid leakage.
2. Fully seat O-ring in groove on underside of saddle outlet component. Position over hole and fully seat saddle onto pipe. Note: Saddle outlets are piloted. Be sure pilot lip fully engages with hole in pipe.
3. Place strap component opposite outlet and secure with bolts (4), nuts (4), and washers (8). Washers **MUST** be placed under each bolt head and nut to avoid damage to saddle.
4. Tighten bolts to specified torque.
5. Saddle is now ready for user-supplied sensor device installation.

Glue-On style Saddle Installation

1. Using a standard industrial-grade hole saw, cut specified hole in desired position on pipe according to recommended hole saw size. Note: Care must be taken to deburr hole and remove all residue from hole and cement area to assure proper fit.
2. Dry fit saddle over hole and mark perimeter on pipe.
3. Clean pipe and saddle glue surface, apply solvent cement to saddle and to pipe, fully covering marked area.
4. Immediately press saddle onto pipe while rotating the saddle on the pipe slightly to distribute the cement. Secure each end of saddle with gear-type clamp or strap to maintain compression until solvent cement fully cures.
5. Saddle is now ready for user-supplied sensor device installation.

X. PRESSURE TESTING SYSTEM

After all joints have properly cured, the Secondary Containment system may be air tested at 5 to 8 psig regulated pressure. **WARNING: System must NOT be tested with direct connection of air-line, nitrogen bottle, or similar unregulated pressure device. Test apparatus must be equipped with both a pressure limiting device at the source to assure that 8 psig pressure is not exceeded and an air relief device at the far end of the system set at a maximum pressure of 8 psig. FAILURE TO FOLLOW THIS PROCEDURE CAN RESULT IN SERIOUS OR FATAL BODILY INJURY.** Use a spray bottle of soap and water solution to check for leaks at joints. The Primary Carrier system should be hydrostatically tested. Flush the system to remove any debris and slowly fill to remove all entrapped air.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Double Containment Design & Installation Guide

Appendix A: General Solvent Cement Welding Procedures

For best results, installation should be made at temperatures between 40°F and 110°F. All joint components should be inspected for any breaking, chipping, gouging or other visible damage before proceeding. All pipe, fittings and valves should be removed from packaging or containers and exposed to the installation environment for a minimum of one hour in order to thermally balance all components. All joining components must be clean and dry.

Important: TAKE EXTRA CARE THAT NO PRIMER OR SOLVENT CEMENT IS ALLOWED TO COME IN CONTACT WITH THE BALL OR OTHER INTERNAL COMPONENTS OF VALVES, EXPANSION JOINTS, OR UNIONS.

Step 1: Cut Pipe Square

Pipe ends must be cut square, using a wheel-type cutter or saw & miter box. A fine-toothed hand saw (16-18 teeth/inch) with little or no set is recommended. A power cut-off saw with carbide blade is recommended for high volume cutting.

Step 2: Deburr & Bevel Pipe

Regardless of cutting method used in Step 1, burrs are created which must be removed from both the pipe I.D. and O.D. before joining. All pipe ends should be beveled 10° to 15°. Commercially available deburring & beveling tool is recommended, or a mill file may be used.

Step 3: Clean Joint Components

Wipe away all loose dirt and moisture from the pipe O.D. and fitting I.D. with a clean, dry cotton rag. DO NOT ATTEMPT TO JOIN WET SURFACES.

Step 4: Check Joint Interference Fit

An interference between pipe and fitting socket is necessary for proper fusion of the joint. To check, lightly insert pipe into fitting socket. DO NOT FORCE. Interference between pipe and fitting must occur between ½ of the socket depth (full interference fit) and the socket bottom (net fit). Do not use components which improperly mate.

Step 5: Apply Primer

NOTE: Certain Double Containment solvent cement connections should be made using a one-step type cement specifically designed for use without primer. Go to Step 6 if using a one-step type of solvent cement.

Primer is necessary to penetrate and soften both pipe and fitting socket surfaces in order for the solvent cement to properly bond. THE MOST FREQUENT CAUSE OF JOINT FAILURES IS INADEQUATE SOLVENT PENETRATION AND SOFTENING OF BONDING SURFACES DURING THE WELDING OPERATION.

1. Using a brush or applicator size not less than ½ the pipe diameter, apply a liberal coat of primer with a scrubbing motion to the fitting socket until the surface is softened and semi-fluid. This may take 5 to 15 seconds depending on size and temperature (larger diameters and lower temperatures will increase required time).
2. Apply primer to pipe in the same manner, extending application area to slightly more than the insertion depth into the fitting socket.
3. Apply a second coat to both the fitting socket and the pipe.
4. Check penetration and softening by scraping the primed surfaces. A few thousandths of the semi-fluid surface should be easily removed. Repeat primer application if necessary.

Step 6: Apply Solvent Cement

Solvent cement must be applied IMMEDIATELY to primed surfaces before the primer dries, in an alternating 3-coat application. Using a brush or applicator size no less than ½ the pipe diameter, apply a liberal coat of solvent cement to the primed pipe surface, then apply a light to medium coat to the primed fitting socket. If a "net fit" was experienced during dry fit check (Step 4), apply an additional coat again to the pipe surface. BE SURE TO USE A VERY LIBERAL AMOUNT OF SOLVENT CEMENT ON PIPE.

Step 7: Join Components

IMMEDIATELY following application of cement and before it starts to set, insert the pipe into the socket with a 1/4-turn twisting motion to evenly distribute cement within the joint. A full bead of cement should form around the circumference of the joint. Hold joint together for approximately 30 seconds to make sure the pipe does not move or back out of the socket.

Step 8: Remove Excess Cement

Using a cloth, wipe clean all excess cement from the exterior juncture of the pipe and fitting.

Step 9: Initial Set & Cure Time

Initial Set & Cure Time must be followed in accordance with the solvent cement manufacturer's instructions.

NOT FOR USE WITH COMPRESSED AIR OR GAS

Double Containment Design & Installation Guide



Appendix B: Sample Engineering Specification

1.0 System Design and Manufacturer

1.1 Thermoplastic Double Containment System shall be a floating carrier design constructed from conventional pipe and fittings meeting applicable ASTM requirements for all standard configurations of primary carrier and secondary containment. System shall include all pipe, fittings, centralizers, valves and valve boxes to be supplied by Spears® Manufacturing Company.

1.2 Standard configurations (tees, elbows, crosses, etc.) of primary carrier fitting shall be equipped with extender couplings for installation in secondary containment pipe and fittings.

1.3 Primary carrier system shall be supported by polypropylene slide-on centralizer brackets positioned with clean-room adhesive. Centralizers shall provide annular space suitable for drainage or installation of user-supplied leak detection cable.

1.4 Specialty fittings shall be according to manufacturer's specifications and suitable for use with specified primary carrier and secondary containment system. Specialty fittings include the following:

Termination Fitting for start and stop of secondary containment.

Closure Fitting for joining two (2) secondary containment lines that meet.

Expansion Joint/Coupling for thermal expansion/contraction compensation or joining of pipe lines.

Sensor Saddles for connection of user-supplied leak detection apparatus.

Any other custom fitting configuration designed for the system.

1.5 Double Containment System shall be air-vented in the secondary containment to prohibit pressurization in excess of 10 psi.

1.6 Valve Box enclosure for ball and ball check valves shall be Tee-Style with specified valve installed and [option: external stem extension].

2.0 Size & Materials

2.1 Double Containment system shall be [specify size, material & schedule *] primary carrier pipe and fittings and [specify size, material & schedule] secondary containment pipe and fittings.

2.2 All primary carrier and secondary containment pipe and fittings shall be manufactured from [specify: PVC, cell class 12454 or CPVC, cell class 23447] materials, according to ASTM D 1784.

2.3 All primary carrier and secondary containment pipe shall meet the requirements of [specify: ASTM D 1785 for PVC or ASTM F 441 for CPVC].

2.4 All standard configuration primary carrier and secondary containment fittings shall meet the requirements of [specify: ASTM D 2466 for PVC Schedule 40, D 2467 for PVC Schedule 80 or F 439 for Schedule 80 CPVC]. All special configuration fittings shall meet the manufacturer's design requirements and be suitable for use with the designated pipe.

3.0 Installation

3.1 Double Containment System shall be installed in accordance with Spears® Double Containment Design & Installation Guide.

3.2 Installation shall be made by qualified personnel trained in making solvent cement joints per ASTM practice D 2855, and flanged joint assembly according to manufacturer's instructions.

3.3 Primary carrier and secondary containment pipe and fitting connections shall be made by conventional solvent cement welding. Flanged assembly connections may be used where required for disassembly or as a design necessity. Solvent cement shall be user supplied and medium to heavy bodied as required. Solvent cement shall be IPS Weld-On or equal.

* = See standard size, material and pipe Schedule combinations. Custom size, material and Schedule combinations by request.

NOT FOR USE WITH COMPRESSED AIR OR GAS



Double Containment

CONTENT

Double Containment Overview

| | |
|----------------------------------|---|
| DOUBLE CONTAINMENT SYSTEM DESIGN | 1 |
| CONFIGURATIONS | 1 |

Tees

| | |
|---------------------------------------|---|
| DC Tee PVC Sch 40 x PVC Sch 40 | 2 |
| DC Tee PVC Sch 40 x PVC Sch 40 Clear | 2 |
| DC Tee PVC Sch 80 x PVC Sch 40 | 2 |
| DC Tee PVC Sch 80 x PVC Sch 40 Clear | 3 |
| DC Tee PVC Sch 80 x PVC Sch 80 | 3 |
| DC Tee CPVC Sch 80 x PVC Sch 40 | 3 |
| DC Tee CPVC Sch 80 x PVC Sch 80 | 3 |
| DC Tee CPVC Sch 80 x CPVC Sch 80 | 3 |
| DC Tee CPVC Sch 80 x PVC Sch 40 Clear | 3 |

90° Ells

| | |
|---|---|
| DC 90° Ell PVC Sch 40 x PVC Sch 40 | 4 |
| DC 90° Ell PVC Sch 40 x PVC Sch 40 Clear | 4 |
| DC 90° Ell PVC Sch 80 x PVC Sch 40 | 4 |
| DC 90° Ell PVC Sch 80 x PVC Sch 40 Clear | 5 |
| DC 90° Ell PVC Sch 80 x PVC Sch 80 | 5 |
| DC 90° Ell CPVC Sch 80 x PVC Sch 40 | 5 |
| DC 90° Ell CPVC Sch 80 x PVC Sch 80 | 5 |
| DC 90° Ell CPVC Sch 80 x CPVC Sch 80 | 5 |
| DC 90° Ell CPVC Sch 80 x PVC Sch 40 Clear | 5 |

45° Ells

| | |
|---|---|
| DC 45° Ell PVC Sch 40 x PVC Sch 40 | 6 |
| DC 45° Ell PVC Sch 40 x PVC Sch 40 Clear | 6 |
| DC 45° Ell PVC Sch 80 x PVC Sch 40 | 6 |
| DC 45° Ell PVC Sch 80 x PVC Sch 40 Clear | 7 |
| DC 45° Ell PVC Sch 80 x PVC Sch 80 | 7 |
| DC 45° Ell CPVC Sch 80 x PVC Sch 40 | 7 |
| DC 45° Ell CPVC Sch 80 x PVC Sch 80 | 7 |
| DC 45° Ell CPVC Sch 80 x CPVC Sch 80 | 7 |
| DC 45° Ell CPVC Sch 80 x PVC Sch 40 Clear | 7 |

Couplings

| | |
|---|---|
| DC Coupling PVC Sch 40 x PVC Sch 40 | 8 |
| DC Coupling PVC Sch 40 x PVC Sch 40 Clear | 8 |
| DC Coupling PVC Sch 80 x PVC Sch 40 | 8 |
| DC Coupling PVC Sch 80 x PVC Sch 40 Clear | 9 |



CONTENT

| | |
|--|---|
| DC Coupling PVC Sch 80 x PVC Sch 80 | 9 |
| DC Coupling CPVC Sch 80 x PVC Sch 40 | 9 |
| DC Coupling CPVC Sch 80 x PVC Sch 80 | 9 |
| DC Coupling CPVC Sch 80 x CPVC Sch 80 | 9 |
| DC Coupling CPVC Sch 80 x PVC Sch 40 Clear | 9 |

Access Tees

| | |
|--|----|
| DC Access Tee PVC Sch 40 x PVC Sch 40 | 10 |
| DC Access Tee PVC Sch 40 x PVC Sch 40 Clear | 10 |
| DC Access Tee PVC Sch 80 x PVC Sch 40 | 10 |
| DC Access Tee PVC Sch 80 x PVC Sch 40 Clear | 11 |
| DC Access Tee PVC Sch 80 x PVC Sch 80 | 11 |
| DC Access Tee CPVC Sch 80 x PVC Sch 40 | 11 |
| DC Access Tee CPVC Sch 80 x PVC Sch 80 | 11 |
| DC Access Tee CPVC Sch 80 x CPVC Sch 80 | 11 |
| DC Access Tee CPVC Sch 80 x PVC Sch 40 Clear | 11 |

Closure Fittings

| | |
|-------------------------------------|----|
| DC Closure Fitting PVC Sch 40 | 12 |
| DC Closure Fitting PVC Sch 80 | 12 |
| DC Closure Fitting CPVC Sch 80 | 12 |
| DC Closure Fitting PVC Sch 40 Clear | 12 |

Isolation Couplers

| | |
|---|----|
| DC Isolation Coupler PVC Sch 40 x PVC Sch 40 | 13 |
| DC Isolation Coupler PVC Sch 40 x PVC Sch 40 Clear | 13 |
| DC Isolation Coupler PVC Sch 80 x PVC Sch 40 | 13 |
| DC Isolation Coupler PVC Sch 80 x PVC Sch 40 Clear | 14 |
| DC Isolation Coupler PVC Sch 80 x PVC Sch 80 | 14 |
| DC Isolation Coupler CPVC Sch 80 x PVC Sch 40 | 14 |
| DC Isolation Coupler CPVC Sch 80 x Sch 80 Gray | 14 |
| DC Isolation Coupler CPVC Sch 80 x CPVC Sch 80 | 14 |
| DC Isolation Coupler CPVC Sch 80 x PVC Sch 40 Clear | 14 |

Termination Fittings

| | |
|--|----|
| DC Termination Fitting PVC Sch 40 x PVC Sch 40 | 15 |
| DC Termination Fitting PVC Sch 40 x PVC Sch 40 Clear | 15 |
| DC Termination Fitting PVC Sch 80 x PVC Sch 40 | 15 |
| DC Termination Fitting PVC Sch 80 x PVC Sch 40 Clear | 16 |
| DC Termination Fitting PVC Sch 80 x PVC Sch 80 | 16 |
| DC Termination Fitting CPVC Sch 80 x PVC Sch 40 | 16 |
| DC Termination Fitting CPVC Sch 80 x Sch 80 Gray | 16 |



Double Containment

CONTENT

| | |
|---|----|
| DC Termination Fitting CPVC Sch 80 x PVC Sch 40 Clear | 16 |
| DC Termination Fitting CPVC Sch 80 x CPVC Sch 80 | 16 |

Centralizers

| | |
|---|----|
| DC Centralizer IPS O.D. x Sch 40 White I.D. Carrier x Containment | 18 |
| DC Centralizer IPS O.D. x Sch 40 Clear I.D. Carrier x Containment | 18 |
| DC Centralizer IPS O.D. x Sch 80 PVC I.D. Carrier x Containment | 18 |
| DC Centralizer IPS O.D. x Sch 80 CPVC I.D. Carrier x Containment | 18 |

Ball Valve Box With Valve

| | |
|--|----|
| Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 40 x PVC Sch 40 | 19 |
| Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 40 x PVC Sch 40 Clear | 19 |
| Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 40 | 19 |
| Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 40 Clear | 20 |
| Valve Box, with PVC True Union 2000 Industrial Ball Valve PVC Sch 80 x PVC Sch 80 | 20 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 40 | 20 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 80 | 20 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x CPVC Sch 80 | 20 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Valve CPVC Sch 80 x PVC Sch 40 Clear | 20 |

Ball Check Valve Box With Valve

| | |
|--|----|
| Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 40 x PVC Sch 40 | 21 |
| Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 40 x PVC Sch 40 Clear | 21 |
| Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 40 | 21 |
| Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 40 Clear | 22 |
| Valve Box, with PVC True Union 2000 Industrial Ball Check Valve PVC Sch 80 x PVC Sch 80 | 22 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 40 | 22 |



CONTENT

| | |
|--|----|
| Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 80 | 22 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x CPVC Sch 80 | 22 |
| Valve Box, with CPVC True Union 2000 Industrial Ball Check Valve CPVC Sch 80 x PVC Sch 40 Clear | 22 |

Diaphragm Valve Box With Valve

| | |
|---|----|
| Valve Box, with PVC True Union Diaphragm Valve PVC Sch 40 x PVC Sch 40 | 23 |
| Valve Box, with PVC True Union Diaphragm Valve PVC Sch 40 x PVC Sch 40 Clear | 23 |
| Valve Box, with PVC True Union Diaphragm Valve PVC Sch 80 x PVC Sch 40 | 23 |
| Valve Box, with PVC True Union Diaphragm Valve PVC Sch 80 x PVC Sch 40 Clear | 24 |
| Valve Box, with PVC True Union Diaphragm Valve PVC Sch 80 x PVC Sch 80 | 24 |
| Valve Box, with CPVC True Union Diaphragm Valve CPVC Sch 80 x PVC Sch 40 | 24 |
| Valve Box, with CPVC True Union Diaphragm Valve CPVC Sch 80 x PVC Sch 80 | 24 |
| Valve Box, with CPVC True Union Diaphragm Valve CPVC Sch 80 x CPVC Sch 80 | 24 |
| Valve Box, with CPVC True Union Diaphragm Valve CPVC Sch 80 x PVC Sch 40 Clear | 24 |

Clamp-on Saddles for Leak Detection Sensors

| | |
|---|----|
| PVC White Clamp-On Saddle x SR Thread with EPDM O-ring Seal & SS Hardware | 25 |
| PVC Gray Clamp-On Saddle x SR Thread with EPDM O-ring Seal & SS Hardware | 25 |
| PVC Gray Clamp-On Saddle x SR Thread with Viton® O-ring Seal & SS Hardware | 25 |
| CPVC Gray Clamp-On Saddle x SR Thread with EPDM O-ring Seal & SS Hardware | 26 |
| CPVC Gray Clamp-On Saddle x SR Thread with Viton® O-ring Seal & SS Hardware | 26 |

Expansion Joints For Carrier or Containment Piping

| | |
|---|----|
| See Price Schedule 80-1, PVC Schedule 80 Fittings, Unions, Flanges, Tank Adapters & Expansion Joints | 27 |
| See Price Schedule 80C-1, CPVC Schedule 80 Fittings, Unions, Flanges, Tank Adapters & Expansion Joints | 27 |

Double Containment Design & Installation Guide

| | |
|--|----|
| Double Containment Design & Installation Guide | 28 |
|--|----|

The Spears® Quality Policy

It is the policy and objective of Spears® Manufacturing Company to produce a superior quality product suitable for its intended use, with regard to functionality, structural integrity, and conformance to established industry standards and practices. It is the commitment of this Company to do so in a manner which provides consistency of product quality, optimum availability, and superior customer service, while maintaining efficiency of operations and profitability necessary to perpetuate product improvement and customer satisfaction. Furthermore, it is recognized that the attainment of these objectives is the responsibility of all Company operations and personnel according to their respective functions.



SPEARS® MANUFACTURING COMPANY • CORPORATE OFFICE

15853 Olden St., Sylmar, CA 91342 • PO Box 9203, Sylmar, CA 91392
(818) 364-1611 • www.spearsmfg.com



PACIFIC SOUTHWEST

15860 Olden St.
Sylmar (Los Angeles), CA 91342
(818) 364-1611 • (800) 862-1499
Fax (818) 367-3014

ROCKY MOUNTAIN

4880 Florence St.
Denver, CO 80238
(303) 371-9430 • (800) 777-4154
Fax (303) 375-9546

UTAH

5395 West 1520 South
Salt Lake City, UT 84104
(303) 371-9430 • (800) 777-4154
Fax (303) 375-9546

SOUTHEAST

4205 Newpoint Pl., Suite 100
Lawrenceville (Atlanta), GA 30043
(678) 985-1263 • (800) 662-6326
Fax (678) 985-5642

MIDWEST

1 Gateway Ct., Suite A
Bolingbrook (Chicago), IL 60440
(630) 759-7529 • (800) 662-6330
Fax (630) 759-7515

NORTHWEST

4103 C St. NE Suite 200
Auburn (Seattle), WA 98002
(253) 939-4433 • (800) 347-7327
Fax (253) 939-7557

SOUTH CENTRAL

1000 Lakeside Parkway
Flower Mound, TX 75028
(469) 528-3000 • (800) 441-1437
Fax (469) 528-3001

NORTHEAST

590 Industrial Dr., Suite 100
Lewisberry (Harrisburg), PA 17339-9532
(717) 938-8844 • (800) 233-0275
Fax (717) 938-6547

FLORIDA

9563 Parksouth Court
Orlando, FL 32837
(407) 843-1960 • (800) 327-6390
Fax (407) 425-3563

INTERNATIONAL SALES

15853 Olden St.
Sylmar (Los Angeles), CA 91342
(818) 364-1611 • Fax (818) 898-3774